

T8 Luxline Plus

F58W/T8/840
0001530



Product features



PRODUCT OVERVIEW

Product name	F58W/T8/840
Technology	Fluorescent
Watt (Rated) (W)	58.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940774
E-number SE	8356616
E-number Norway	3815422
Luminous flux (lm)	5200
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	58.00
Product Voltage (V)	110
Dimmable	Yes
Average life (Nominal) (h)	20000
Product EAN number	5410288015309

DATA TABLE

General data

Product name	F58W/T8/840
Technology	Fluorescent
Watt (Rated) (W)	58.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated

T8 Luxline Plus

F58W/T8/840

0001530

Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940774
E-number SE	8356616
E-number Norway	3815422

Optical data

Luminous flux (lm)	5200
Luminous flux (Rated) (lm)	5200
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.96
Rated lumen maint. factor (%) at 4000 h 50Hz	0.94
Rated lumen maint. factor (%) at 6000 h 50Hz	0.92
Rated lumen maint. factor (%) at 8000 h 50Hz	0.91
Rated lumen maint. factor (%) at 12000 h 50Hz	0.90
Rated lumen maint. factor (%) at 16000 h 50Hz	0.89
Rated lumen maint. factor (%) at 20000 h 50Hz	0.87

Electrical data

Wattage (W)	58.00
Watt (Rated) - High frequency (W)	50.00
Current (A)	0.670
Mains voltage (V)	220-240V~
Product Voltage (V)	110
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	670
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	68

Lifetime data

Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000

T8 Luxline Plus

F58W/T8/840

0001530

Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.92
Rated survival factor (%) at 16000 h 50Hz	0.80
Rated survival factor (%) at 20000 h 50Hz	0.50

Physical data

Nominal Product Length (mm)	1500.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	1500.0
Length base to pin Min-Max (mm) - B	1504.7-1507.1
Max. Lamp Length (mm) - C/L	1514.2
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.2


Packaging

Single packaging type	Carton
Product EAN number	5410288015309
Packaging single length / height (cm)	151.1
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.8
DUN14 (outer)	15410288015306
Units per outer package	25
Packaging outer length / height (cm)	154.5
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	15.0

Safety data


Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

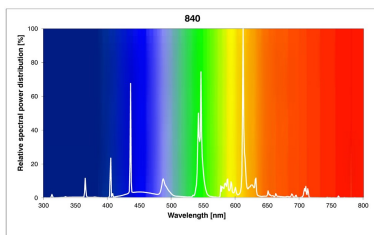


T8 Luxline Plus
F58W/T8/840
0001530

TECHNICAL DRAWINGS



0001530

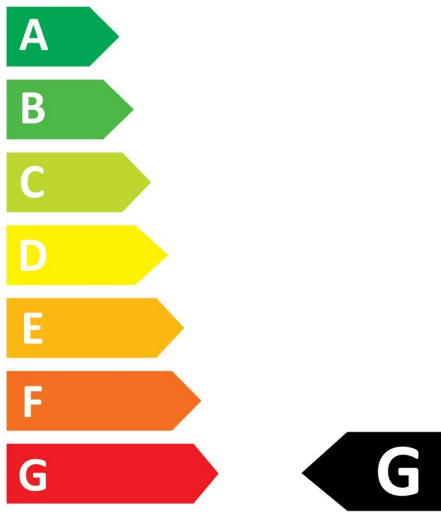

58
kWh/1000h




2019/2015

SYLVANIA

T8 Luxline Plus
F58W/T8/840
0001530



0001530

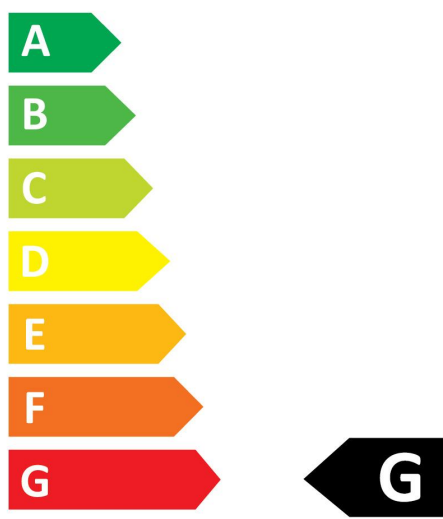

58
kWh/1000h



2019/2015