


## Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR PHASE DIM SILVER  
2049588



### Product features

- High-end architectural (4000K) neutral white LED pendant with Phase dimmable driver and remote gear housing, finished in a silver finish (RAL9006)

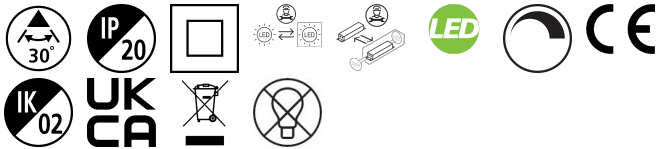

### PRODUCT OVERVIEW

Product name	MYRIAD PENDANT 4000K REMOTE GEAR PHASE DIM SILVER
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001743
Warranty	5 years
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30

## Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR PHASE DIM SILVER  
2049588

Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Remote
Dimmable	Yes
Housing colour	Silver
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495887

### DATA TABLE

#### General data

Product name	MYRIAD PENDANT 4000K REMOTE GEAR PHASE DIM SILVER
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric

#### Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Remote
Transformer required	Yes
Dimmable	Yes
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

#### Lifetime data

Lifespan L70 B50	50000
------------------	-------

## Myriad Pendant Silver - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR PHASE DIM SILVER  
2049588


### Physical data

Housing colour	Silver
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	75
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.45

### Packaging

Single packaging type	Carton
Product EAN number	5025768495887
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

## PHOTOMETRY

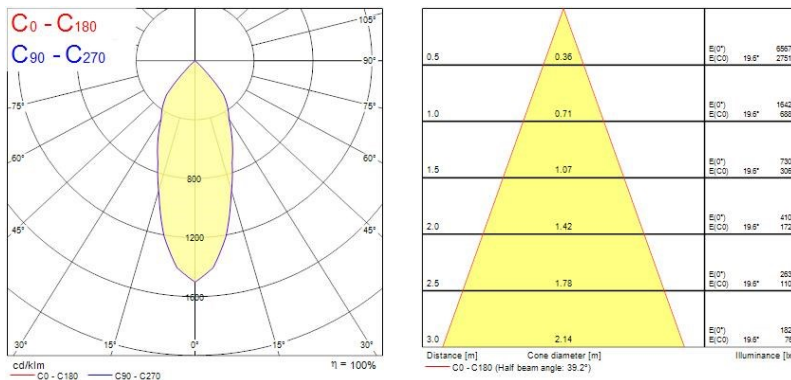

## TECHNICAL DRAWINGS

