

T5 Circline Plus

T5 Circline Plus 55W/840
0000528



Product features

- T5 Circline Plus



PRODUCT OVERVIEW

Product name	T5 Circline Plus 55W/840
Technology	Fluorescent
Watt (Rated) (W)	55.00
Lamp shape	Ring
Type	T5 Circline Plus
Cap/Base	2GX13
Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940721
Luminous flux (lm)	4200
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	55.00
Product Voltage (V)	101
Dimmable	Yes
Average life (Nominal) (h)	16000
Product EAN number	5410288005287

DATA TABLE

General data

Product name	T5 Circline Plus 55W/840
Technology	Fluorescent
Watt (Rated) (W)	55.00
Lamp shape	Ring
Type	T5 Circline Plus
Cap/Base	2GX13

T5 Circline Plus

T5 Circline Plus 55W/840
0000528

Lamp finish	Frosted/Coated
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940721

Optical data

Luminous flux (lm)	4200
Luminous flux (Rated) (lm)	4200
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.85
Rated lumen maint. factor (%) at 4000 h 50Hz	0.83
Rated lumen maint. factor (%) at 6000 h 50Hz	0.82
Rated lumen maint. factor (%) at 8000 h 50Hz	0.80
Rated lumen maint. factor (%) at 12000 h 50Hz	0.77
Rated lumen maint. factor (%) at 16000 h 50Hz	0.72

Electrical data

Wattage (W)	55.00
Watt (Rated) - High frequency (W)	55
Current (A)	0.55
Mains voltage (V)	220-240V~
Product Voltage (V)	101
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	61

Lifetime data

Average life (Nominal) (h)	16000
Average life (Rated) (h)	16000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.97
Rated survival factor (%) at 6000 h 50Hz	0.93
Rated survival factor (%) at 8000 h 50Hz	0.85

T5 Circline Plus

T5 Circline Plus 55W/840
0000528

Rated survival factor (%) at 12000 h 50Hz	0.78
Rated survival factor (%) at 16000 h 50Hz	0.65
Rated survival factor (%) at 20000 h 50Hz	0.50

Physical data

Nominal Product Height (mm)	16
Nominal Product Diameter (mm)	299
Max. Length base to base (mm) - A	299
Length base to pin Min-Max (mm) - B	299
Max. Lamp Diameter (mm) - D	16.0
Weight (kg)	0.103


Packaging

Single packaging type	Carton
Product EAN number	5410288005287
Packaging single length / height (cm)	30.6
Packaging single width (cm)	30.4
Packaging single depth (cm)	2.5
DUN14 (outer)	15410288005284
Units per outer package	10
Packaging outer length / height (cm)	30.2
Packaging outer width (cm)	31.7
Packaging outer depth (cm)	32.6

Safety data

Lamp mercury content (mg)	2.70
Breakage cleaning instructions	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes


PHOTOMETRY

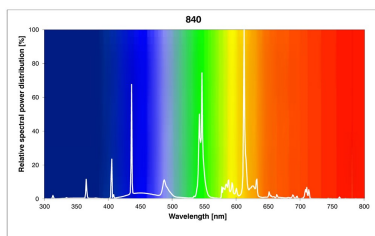


TECHNICAL DRAWINGS

SYLVANIA

T5 Circline Plus
T5 Circline Plus 55W/840
0000528



0000528

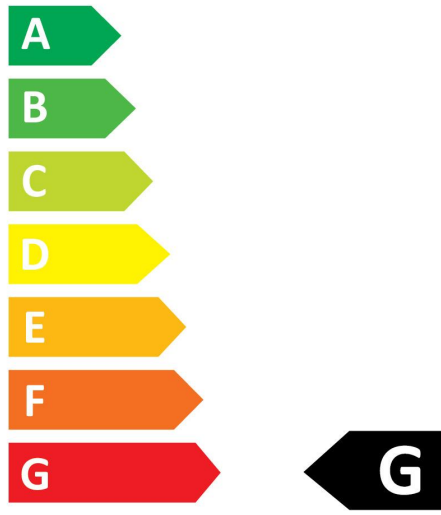

55
kWh/1000h




2019/2015

SYLVANIA

T5 Circline Plus
T5 Circline Plus 55W/840
0000528



0000528

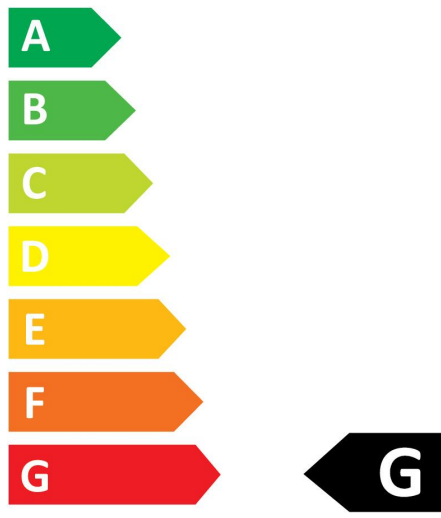

55
kWh/1000h



2019/2015