

## Brio IP65 LED - Vandal Resistant

*BRIO IP55VR LED 4000K DALI Emergency*  
4054975



### PRODUCT OVERVIEW

Product name	BRIO IP55VR LED 4000K DALI Emergency
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Logistics & Industry, Museums & Galleries, Office, Retail
Colour temperature (K)	4000
Electrical protection	Class II
Control gear mounting	Integral
Housing colour	White
IP rating	IP55
IK rating	IK10
Product EAN number	5026524549752

### DATA TABLE

#### General data

Product name	BRIO IP55VR LED 4000K DALI Emergency
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Logistics & Industry, Museums & Galleries, Office, Retail

#### Optical data

Colour temperature (K)	4000
Correlated colour temperature range (K)	4000 - 4000
Adjustable chromaticity	N
Distribution type	Symmetric
Emergency duration (h)	3

## Brio IP65 LED - Vandal Resistant

*BRIO IP55VR LED 4000K DALI Emergency*  
4054975

### Electrical data

Mains voltage (V)	230V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350


### Physical data

Housing colour	White
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	408
Nominal Product Width (mm)	358
Weight (kg)	3.2

### Packaging

Single packaging type	Carton
Product EAN number	5026524549752
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	20.0
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	20.0

## PHOTOMETRY

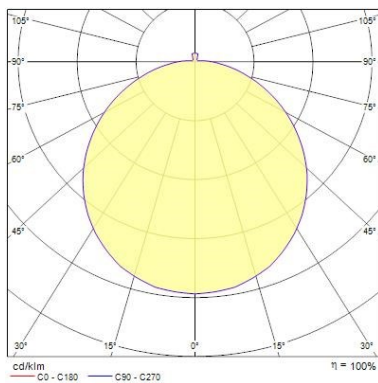

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1</sub> [lx]	E <sub>2</sub> [lx]
0.5	1.56	57.4	205	18
1.0	3.13	57.4	81	4
1.5	4.69	57.4	23	2
2.0	6.25	57.4	13	1
2.5	7.82	57.4	8	1
3.0	9.38	57.4	6	0

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 C0 - C180 (Half beam angle: 114.8°)

## TECHNICAL DRAWINGS

**Brio IP65 LED - Vandal Resistant**  
*BRIO IP55VR LED 4000K DALI Emergency*  
**4054975**

