

START Panel G4 625x625

START PANEL HO 625 3000K G4
0047790



Product features

- LED back-lit recessed panel (high output), 3000K Neutral White, 4500lm delivered from 36W, 125lm/W total system efficiency, energy efficient external driver included as standard, even distribution of light throughout fixture, Average lifespan: 100.000Hrs, size (HxWxD) 620x620x65mm.




PRODUCT OVERVIEW

Product name	START PANEL HO 625 3000K G4
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	107
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288477909

PHOTOMETRY

START Panel G4 625x625
START PANEL HO 625 3000K G4
0047790

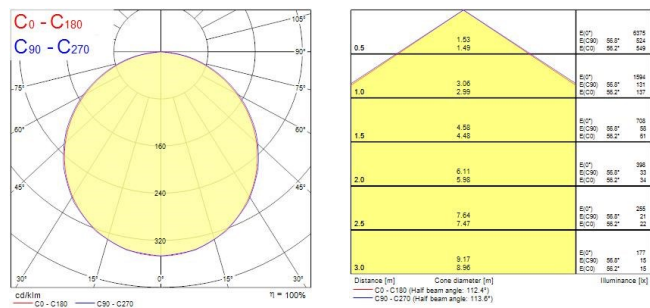

TECHNICAL DRAWINGS

