

## START Panel Flat 600x600


### START FLAT PANEL LED 600 4000K DALI G2

0047753



#### Product features

- Edge lit LED flat panel. Low Flicker, 39 W, Neutral White, 4000 K, 4000 lumens, 104 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, TRIDONIC DALI driver (push dim). (HxWxD) 10.5 x 595 x 595 mm

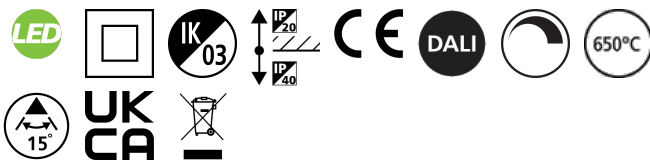


#### PRODUCT OVERVIEW

Product name	START FLAT PANEL LED 600 4000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4274127
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	104
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	15
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288477534

#### PHOTOMETRY

START Panel Flat 600x600  
START FLAT PANEL LED 600 4000K DALI G2  
0047753

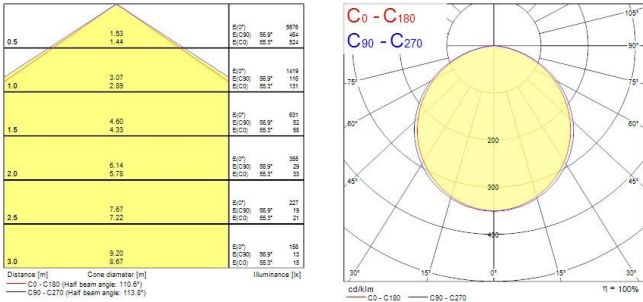

TECHNICAL DRAWINGS

