
Concord



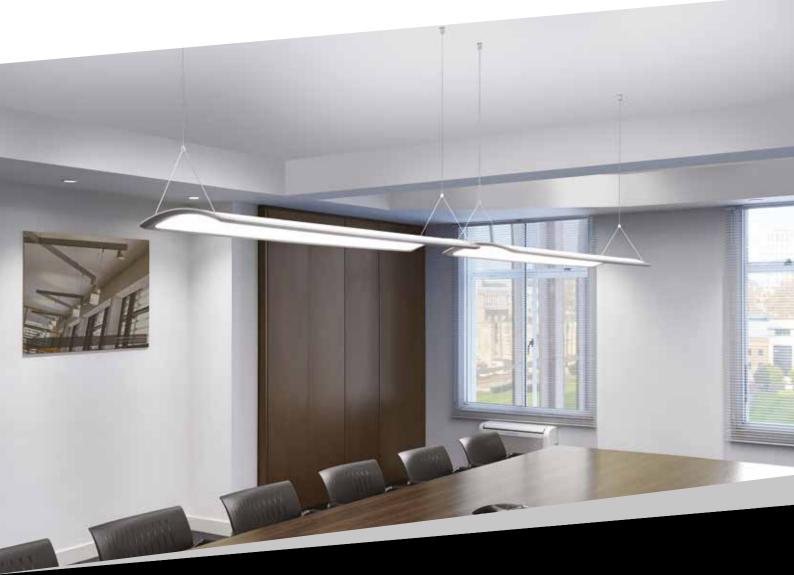

One look and you'll be hooked

Concord Curvelyte Architectural lighting by SYLVANIA

Concord Curvelyte exemplifies a high level detail aesthetic which appeals to designers within the built environment seeking a minimalist design. With its curved lines for a clean, sharp and sleek architectural look Curvelyte is unique.

Not just a pretty face, Curvelyte is also energy efficient and innovative too!

Featuring an LED light guide with a double row of LEDS, Curvelyte places light 70% down and 30% up for a more productive work environment.

Please visit our website for more information or speak to one of our highly knowledgeable engineers.



SYLVANIA sylvania-lighting.com

Concord Curvelyte



Features

- Unique curved lighting shape perfect for offices, schools and conference rooms
- Direct Indirect (70/30) lighting for ambient illumination
- UGR 19 versions for visual comfort
- Uniform light for aesthetics
- Powered through suspension cable for easy installation and low visual impact
- Surface mount accessories are available in different colours and shapes to enhance ceiling appearance

- Highly efficient up to 131 lumens / Watt
- L90B10 @ 50,000 hours., Long service life with lumen maintenance of 90% at 50,000 hours
- Driver lifetime: 50,000 hours with max 10% failure
- Low LED flicker <5%
- Color Rendering Index (Ra)>80 for office applications
- LED Color consistency between luminaries <3 SDCM
- DALI (Switch-dim) dimmable

Product information

Code	Description	Fixture Power (W)	Luminous Flux (Im)	Efficacy (lm/W)	Colour Temp (K)	Control Technology	UGR
Curvelyte							
Black							
2093175	Curvelyte 1265 HO D/I 3K DALI Black	55	6250	114	3000	DALI	22
2093176	Curvelyte 1265 HO D/I 4K DALI Black	55	6750	123	4000	DALI	22
2093186	Curvelyte 1265 HO LG D/I 3K DALI Black	55	5000	91	3000	DALI	19
2093187	Curvelyte 1265 HO LG D/I 4K DALI Black	55	5450	99	4000	DALI	19
White							
2093180	Curvelyte 1265 HO D/I 3K DALI White	55	6600	120	3000	DALI	23
2093181	Curvelyte 1265 HO D/I 4K DALI White	55	7200	131	4000	DALI	23
2093188	Curvelyte 1265 HO LG D/I 3K DALI White	55	5300	96	3000	DALI	19
2093189	Curvelyte 1265 HO LG D/I 4K DALI White	55	5800	105	4000	DALI	19

Legend: 1265 = 1265 mm; H0 = High Output; LG = Low Glare (UGR=19); D/I = Direct / Indirect Lighting 70/30%; 3K = Warm White 3000K; 4K = Neutral White 4000K

Accessories


Code	Description	Body Colour
2093177	Curvelyte box 1 cylin 1 rectan sm Black	Black
2093169	Curvelyte box 1 cylin 1 rectan sm White	White
2093178	Curvelyte box 2 rectan sm Black	Black
2093171	Curvelyte box 2 rectan sm White	White




Photometric Data

Standard version

Low Glare version













 Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited. Copyright Feilo Sylvania Europe Limited April 2019

Т:	F:
Email:	