

Start Waterproof LED

START WATERPROOF LED 1565MM SINGLE 4000K

0047874



Product features

- Weather resistant LED Luminaire, 1565MM with Single Lamp, 40W at 4000K, 111lm/W. UV stabilised polycarbonate cover with specially designed opal lens - softens and control the light whilst optimising output. No yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle. Minimal maintenance with no replacement of lamps . Through wiring achievable. IP65 rating and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible.



PRODUCT OVERVIEW

Product name	START WATERPROOF LED 1565MM SINGLE 4000K
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended
Environment	Internal/External with protection
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4306902
E-number SE	7212790
Fixture luminous flux (lm)	4450
Luminaire efficacy (lm/W)	111
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288478746

DATA TABLE

General data

Product name	START WATERPROOF LED 1565MM SINGLE 4000K
--------------	--

Start Waterproof LED

START WATERPROOF LED 1565MM SINGLE 4000K
0047874

Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended
Environment	Internal/External with protection
General application	Logistics & Industry
Operating temperature range (°C)	-30°C - 40°C
ETIM Class	EC000109
E-number FI	4306902
E-number SE	7212790

Optical data

Fixture luminous flux (lm)	4450
Luminaire efficacy (lm/W)	111
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Direct
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	40
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class I
Control gear type	LED driver constant current
Transformer required	Yes
Dimmable	No
Drive current (mA)	1000
Inrush Current (A)	5.52
Inrush Duration (µs)	107
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	20
Max. Luminaires per 16A C Breaker	51
Max. Luminaires per 20A C Breaker	62
Max. Luminaires per 16A B Breaker	45
Max. Luminaires per 20A B Breaker	57

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent

Start Waterproof LED

START WATERPROOF LED 1565MM SINGLE 4000K
0047874

Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1565
Nominal Product Width (mm)	83
Nominal Product Height (mm)	91
Weight (kg)	1.862



Packaging

Single packaging type	Mix blister(20% carton, 80% pl)
Product EAN number	5410288478746
Packaging single length / height (cm)	156.5
Packaging single width (cm)	8.6
Packaging single depth (cm)	9.5
DUN14 (outer)	05410288478746
Units per outer package	1
Packaging outer length / height (cm)	156.5
Packaging outer width (cm)	8.6
Packaging outer depth (cm)	9.5

Safety data

Optimal operating condition (°C)	-30-40
----------------------------------	--------

PHOTOMETRY

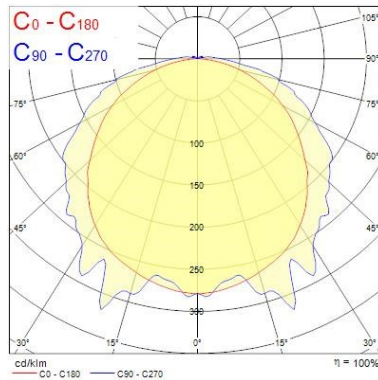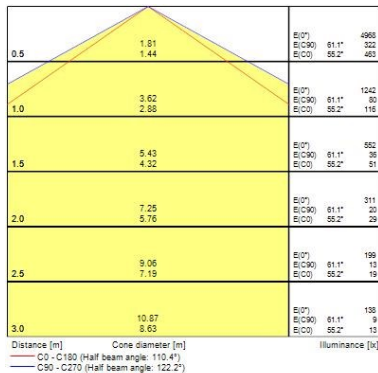

TECHNICAL DRAWINGS

