

Start Waterproof LED

START WATERPROOF LED 1565MM SINGLE 4000K

0047874



Product features

- Weather resistant LED Luminaire, 1565MM with Single Lamp, 40W at 4000K, 111lm/W. UV stabilised polycarbonate cover with specially designed opal lens - softens and control the light whilst optimising output. No yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle. Minimal maintenance with no replacement of lamps . Through wiring achievable. IP65 rating and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible.




PRODUCT OVERVIEW

| | |
|---------------------------------|--|
| Product name | START WATERPROOF LED 1565MM SINGLE 4000K |
| Technology | LED |
| Housing | PC Polycarbonate |
| Mount | Ceiling surface mounting, Suspended |
| Environment | Internal/External with protection |
| General application | Logistics & Industry |
| ETIM Class | EC000109 |
| E-number FI | 4306902 |
| E-number SE | 7212790 |
| Fixture luminous flux (lm) | 4450 |
| Luminaire efficacy (lm/W) | 111 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Beam Angle (°) | 120 |
| Glare control | < 25 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 40 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | No |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288478746 |

PHOTOMETRY

Start Waterproof LED
START WATERPROOF LED 1565MM SINGLE 4000K
0047874

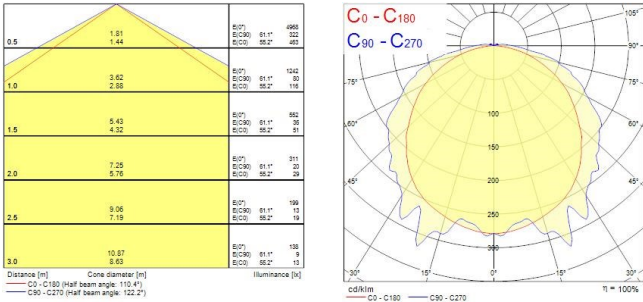

TECHNICAL DRAWINGS

