


Sylmaster T5 - PA Louvre

FHE 16 2x28W G5
0055722



Product features

- Sylmaster T5 - PA Louvre

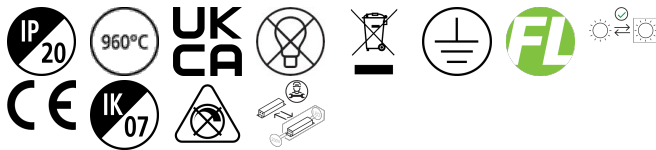

PRODUCT OVERVIEW



Product name	FHE 16 2x28W G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Interior
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number SE	7098466
E-number Norway	3306308
Warranty	2 years
Fixture luminous flux (lm)	3640
Luminaire efficacy (lm/W)	57
LOR (%)	70
Light colour	N/A
Total power consumption (W)	64
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288557229
Light source included	N/A - Not Applicable

PHOTOMETRY

Sylmaster T5 - PA Louvre FHE 16 2x28W G5 0055722

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam height [m]	Beam width [m]	Beam area [m²]	Beam volume [m³]	Beam weight [kg]
0.5	1.19	111.7°	1.19	0.5	1.19	0.89	0.44	0.44
1.0	2.39	111.7°	2.39	1.0	2.39	3.56	1.78	1.78
1.5	3.58	111.7°	3.58	1.5	3.58	5.32	2.66	2.66
2.0	4.77	111.7°	4.77	2.0	4.77	7.10	3.55	3.55
2.5	5.96	111.7°	5.96	2.5	5.96	8.87	4.44	4.44
3.0	7.15	111.7°	7.15	3.0	7.15	10.65	5.32	5.32

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam height [m]	Beam width [m]	Beam area [m²]	Beam volume [m³]	Beam weight [kg]
0.5	1.19	111.7°	1.19	0.5	1.19	0.89	0.44	0.44
1.0	2.39	111.7°	2.39	1.0	2.39	3.56	1.78	1.78
1.5	3.58	111.7°	3.58	1.5	3.58	5.32	2.66	2.66
2.0	4.77	111.7°	4.77	2.0	4.77	7.10	3.55	3.55
2.5	5.96	111.7°	5.96	2.5	5.96	8.87	4.44	4.44
3.0	7.15	111.7°	7.15	3.0	7.15	10.65	5.32	5.32

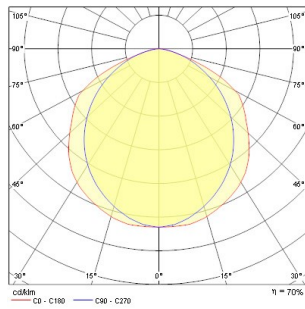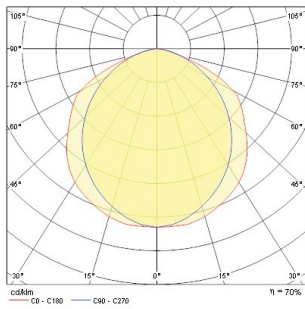

TECHNICAL DRAWINGS

Dimensions [mm]	L	H	F	Height [mm]
1x28W	1200	203	85	1000
2x28W	1500	203	85	1000

