


DeltaWing LED - Electronic

DELTAWING LED38 EB 3K 1200
0044870



Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 3000K Warm White, Electronic, 3828lm, 36W, lifespan: 55,000 hours L90B10, A++ A+ A

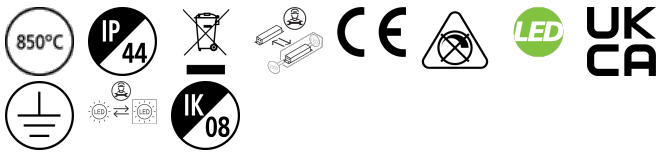

PRODUCT OVERVIEW

Product name	DELTAWING LED38 EB 3K 1200
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
ETIM Class	EC002892
E-number SE	7013999
Warranty	5 years
Fixture luminous flux (lm)	3828
Luminaire efficacy (lm/W)	106.33
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	103
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK08
Product EAN number	5410288448701

PHOTOMETRY


DeltaWing LED - Electronic

DELTA WING LED38 EB 3K 1200
0044870

0.5	1.27	E:0°	488
	1.46	E:C90	375
1.0	2.53	E:0°	1219
	2.91	E:C90	142
1.5	3.80	E:0°	940
	4.37	E:C90	99
2.0	5.08	E:0°	301
	5.82	E:C90	23
2.5	6.33	E:0°	194
	7.23	E:C90	18
3.0	7.60	E:0°	135
	8.73	E:C90	12

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 115.0°)
— C90 - C270 (Half beam angle: 103.4°)

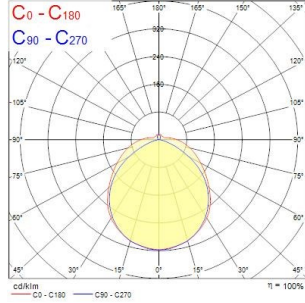

TECHNICAL DRAWINGS

