

Start Waterproof T5

START WATERPROOF T5 PC 2x28 EB
0045830



Product features

- Start Waterproof T5 weatherproof luminaire, Polycarbonate housing, Polycarbonate Diffuser, 2 x 28W, Non Dimmable Electronic Ballast, IP66, IK08, Lamp not included, To be used with LFL tubes



PRODUCT OVERVIEW

| | |
|-----------------------|--------------------------------|
| Product name | START WATERPROOF T5 PC 2x28 EB |
| Technology | T5 Linear Fluorescent |
| Housing | PC Polycarbonate |
| Mount | Ceiling surface mounting |
| General application | Logistics & Industry |
| ETIM Class | EC002892 |
| Warranty | 2 years |
| Light colour | N/A |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Control gear mounting | Integral |
| Housing colour | Grey |
| IP rating | IP66 |
| IK rating | IK08 |
| Product EAN number | 5410288458304 |

DATA TABLE

General data

| | |
|----------------------------------|--------------------------------|
| Product name | START WATERPROOF T5 PC 2x28 EB |
| Technology | T5 Linear Fluorescent |
| Housing | PC Polycarbonate |
| Mount | Ceiling surface mounting |
| General application | Logistics & Industry |
| Operating temperature range (°C) | -20°C - 25°C |
| ETIM Class | EC002892 |
| Warranty | 2 years |

Optical data

| | |
|-------------------------|-----|
| Light colour | N/A |
| Adjustable chromaticity | N |

Electrical data

| | |
|-----------------------|-----------|
| Mains voltage (V) | 220-240V~ |
| Electrical protection | Class I |

Start Waterproof T5 START WATERPROOF T5 PC 2x28 EB 0045830

| | |
|------------------------|--------------------|
| Control gear type | Electronic ballast |
| Control gear mounting | Integral |
| Transformer required | Yes |
| Nominal Frequency (Hz) | 50/60Hz |

Physical data

| | |
|-----------------------------|------------------|
| Housing colour | Grey |
| IP rating | IP66 |
| IK rating | IK08 |
| Diffuser finish | Prismatic |
| Diffuser material | PC Polycarbonate |
| Nominal Product Length (mm) | 1277 |
| Nominal Product Width (mm) | 116 |
| Nominal Product Height (mm) | 100 |
| Weight (kg) | 1.828 |


Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288458304 |
| Packaging single length / height (cm) | 127.7 |
| Packaging single width (cm) | 11.6 |
| Packaging single depth (cm) | 9.4 |
| DUN14 (outer) | 05410288458304 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 127.7 |
| Packaging outer width (cm) | 11.6 |
| Packaging outer depth (cm) | 9.4 |

Safety data

| | |
|----------------------------------|--------|
| Optimal operating condition (°C) | -20-25 |
|----------------------------------|--------|

PHOTOMETRY

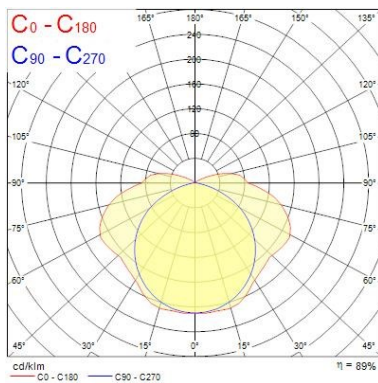

TECHNICAL DRAWINGS

Start Waterproof T5 START WATERPROOF T5 PC 2x28 EB 0045830

