

## Start Waterproof LED

START WATERPROOF LED 662MM SINGLE 4000K

0047870



### Product features

- Weather resistant LED Luminaire, 662MM with Single Lamp, 12W at 4000K, 101lm/W. UV stabilised polycarbonate cover with specially designed opal lens - softens and control the light whilst optimising output. No yellow staining. Highly efficient electronic driver included as standard. Smooth body finish, easy to handle. Minimal maintenance with no replacement of lamps . Through wiring achievable. IP65 rating and IK08 body durable for harsh locations. Professionally finished with Stainless Steel brackets. Suspension compatible.





## PRODUCT OVERVIEW

Product name	START WATERPROOF LED 662MM SINGLE 4000K
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended
Environment	Internal/External with protection
General application	Logistics & Industry
ETIM Class	EC000109
E-number SE	7212799
Fixture luminous flux (lm)	1215
Luminaire efficacy (lm/W)	101
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288478708

## PHOTOMETRY

## Start Waterproof LED *START WATERPROOF LED 662MM SINGLE 4000K* **0047870**

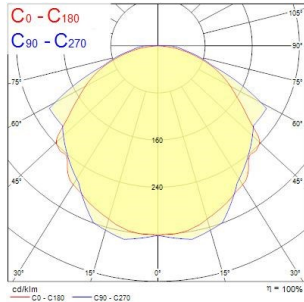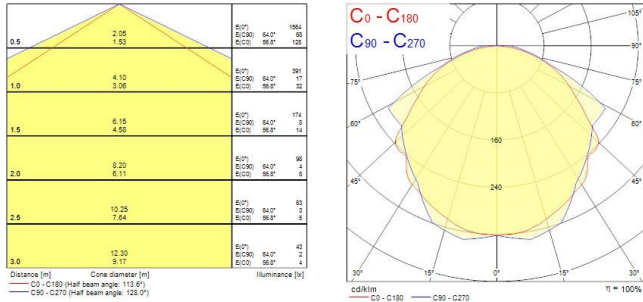

## TECHNICAL DRAWINGS

