

# Monitor LED

Monitor LED 4000K Silver  
4055004



## PRODUCT OVERVIEW

Product name	Monitor LED 4000K Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
E-number FI	4579229
Colour temperature (K)	4000
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	Silver
IP rating	IP55
IK rating	IK10
Product EAN number	5026524550048

## DATA TABLE

### General data

Product name	Monitor LED 4000K Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
E-number FI	4579229

### Optical data

Colour temperature (K)	4000
Correlated colour temperature range (K)	4000 - 4000
Adjustable chromaticity	N

## Monitor LED

Monitor LED 4000K Silver  
4055004

Distribution type Symmetric

### Electrical data

Mains voltage (V)	230V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350



### Physical data

Housing colour	Silver
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	350
Nominal Product Width (mm)	350
Weight (kg)	4.0

### Packaging


Single packaging type	Carton
Product EAN number	5026524550048
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

## PHOTOMETRY

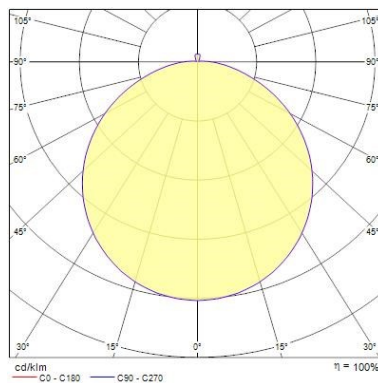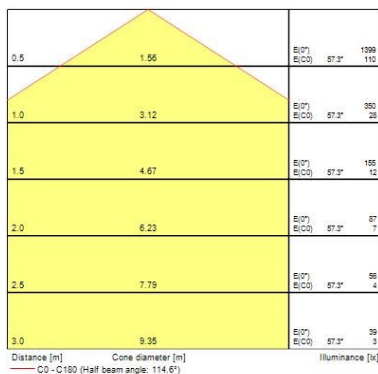

## Monitor LED

Monitor LED 4000K Silver  
4055004

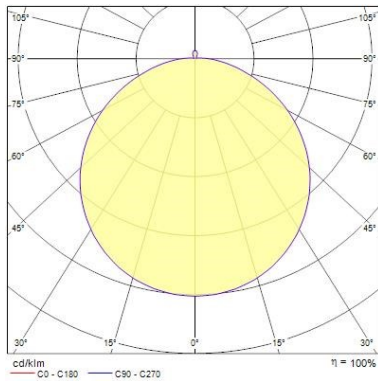

Distance [m]	Cone diameter [m]	$\frac{E(0^\circ)}{E(C0)}$	$\frac{E(0^\circ)}{E(C90)}$	Illuminance [lx]
0.5	1.56	57.4"	742	58
1.0	3.13	57.4"	186	15
1.5	4.69	57.4"	82	6
2.0	6.25	57.4"	46	4
2.5	7.82	57.4"	30	2
3.0	9.38	57.4"	21	1

C0 - C180 (Half beam angle: 114.8°)

## TECHNICAL DRAWINGS

