

## Hydroproof LED G3 DALI

### HYDROPROOF LED G3 600mm Single 4K DALI

0048771



#### Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, DALI dimmable, 4000K, CRI80, 1900 lm, 14 W, 135 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



#### PRODUCT OVERVIEW


Product name	HYDROPROOF LED G3 600mm Single 4K DALI
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4306983
Warranty	5 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	14
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487717

#### PHOTOMETRY

## Hydroproof LED G3 DALI

*HYDROPROOF LED G3 600mm Single 4K DALI*

0048771

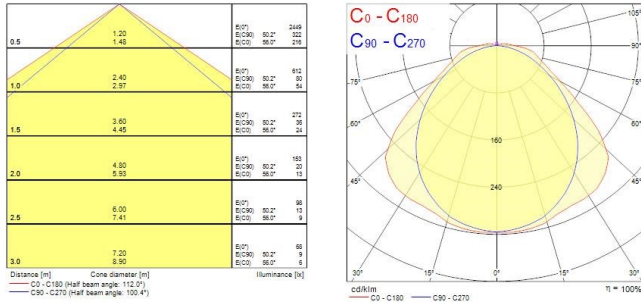

## TECHNICAL DRAWINGS

