


START Panel Flat 625x625

START FLAT PANEL 625 4000K G2
0047755



Product features

- Edge lit LED flat panel. Low Flicker, 40 W, Neutral White, 4000 K, 4000 lumens, 104 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 620 x 620 mm

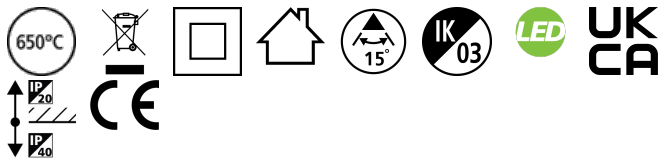


PRODUCT OVERVIEW

Product name	START FLAT PANEL 625 4000K G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	104
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	15
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288477558

PHOTOMETRY

START Panel Flat 625x625 START FLAT PANEL 625 4000K G2 0047755

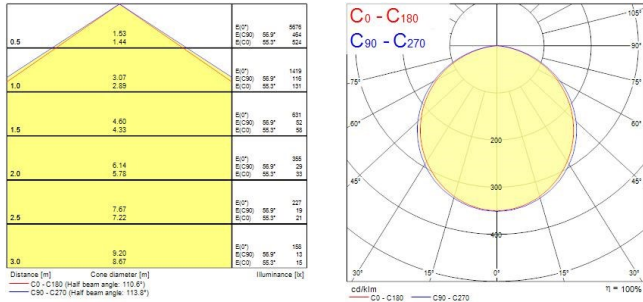

TECHNICAL DRAWINGS

