

Beacon LED Major II


BEACON MAJOR II 4000K SPOT L3 WHITE

2059886



Product features

- Integrated AC LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 33° spot, optics: polycarbonate reflector, colour temperature: 4000K neutral white, total system power: 19W, total fixture output: 1716lm, luminaire efficacy: 90lm/W, LOR: 100%, colour rendering: Ra 80 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 48,000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, mains dimmable, trailing or leading edge dimmable, power factor: 0.9 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø79x118x168mm, weight: 0.40kg.

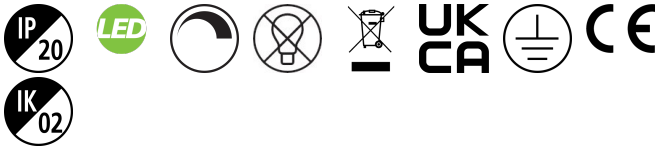

PRODUCT OVERVIEW



Product name	BEACON MAJOR II 4000K SPOT L3 WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Retail, Hospitality
ETIM Class	EC001744
E-number FI	4260828
Warranty	5 years
Fixture luminous flux (lm)	1716
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	33
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	19
Product Voltage (V)	240
Electrical protection	Class I
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768598861

PHOTOMETRY

Beacon LED Major II

BEACON MAJOR II 4000K SPOT L3 WHITE

2059886



TECHNICAL DRAWINGS

