

## HSX Syl-Line

HSXSYL LED NW DALI 1720 WB

0042288

### Product features

- HSX Syl-Line LED, Neutral White, DALI dimmable, 1720mm, Wide Beam



### PRODUCT OVERVIEW

|                             |                                     |
|-----------------------------|-------------------------------------|
| Product name                | HSXSYL LED NW DALI 1720 WB          |
| Technology                  | LED                                 |
| Cap/Base                    | N/A                                 |
| Housing                     | Steel                               |
| Mount                       | Ceiling surface mounting, Suspended |
| Environment                 | Internal                            |
| General application         | Logistics & Industry, Retail        |
| ETIM Class                  | EC002892                            |
| Warranty                    | 5 years                             |
| Fixture luminous flux (lm)  | 6660                                |
| Luminaire efficacy (lm/W)   | 93                                  |
| LOR (%)                     | 100                                 |
| Colour temperature (K)      | 4000                                |
| Light colour                | Neutral White                       |
| CRI (Ra)                    | 80                                  |
| Colour Consistency (SDCM)   | 3                                   |
| Glare control               | < 19                                |
| Total power consumption (W) | 72                                  |
| Electrical protection       | Class I                             |
| Control gear type           | Electronic ballast                  |
| Dimmable                    | Yes                                 |
| Minimum dimming level (%)   | 99                                  |
| Housing colour              | White                               |
| IP rating                   | IP20                                |
| IK rating                   | IK02                                |
| Product EAN number          | 5410288422886                       |

### DATA TABLE

## HSX Syl-Line

HSXSYL LED NW DALI 1720 WB

0042288

### General data

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Product name                     | HSXSYL LED NW DALI 1720 WB          |
| Technology                       | LED                                 |
| Cap/Base                         | N/A                                 |
| Housing                          | Steel                               |
| Mount                            | Ceiling surface mounting, Suspended |
| Environment                      | Internal                            |
| General application              | Logistics & Industry, Retail        |
| Operating temperature range (°C) | -10°C - 25°C                        |
| ETIM Class                       | EC002892                            |
| Warranty                         | 5 years                             |

### Optical data

|                            |               |
|----------------------------|---------------|
| Fixture luminous flux (lm) | 6660          |
| Luminaire efficacy (lm/W)  | 93            |
| LOR (%)                    | 100           |
| Colour temperature (K)     | 4000          |
| Light colour               | Neutral White |
| CRI (Ra)                   | 80            |
| Colour Consistency (SDCM)  | 3             |
| Adjustable chromaticity    | N             |
| Distribution type          | Direct        |
| Glare control              | < 19          |

### Electrical data

|                             |                    |
|-----------------------------|--------------------|
| Total power consumption (W) | 72                 |
| Mains voltage (V)           | 220-240V~          |
| Electrical protection       | Class I            |
| Control gear type           | Electronic ballast |
| Transformer required        | Yes                |
| Dimmable                    | Yes                |
| Minimum dimming level (%)   | 99                 |
| Drive current (mA)          | 350                |
| Glow Wire Test (°C)         | 650                |
| Nominal Frequency (Hz)      | 50/60Hz            |

### Physical data

|                             |                |
|-----------------------------|----------------|
| Housing colour              | White          |
| IP rating                   | IP20           |
| IK rating                   | IK02           |
| Diffuser finish             | Matt/satinized |
| Nominal Product Length (mm) | 1720           |
| Nominal Product Width (mm)  | 164            |
| Nominal Product Height (mm) | 132            |
| Weight (kg)                 | 5.6            |

### Packaging

|                       |               |
|-----------------------|---------------|
| Single packaging type | Carton        |
| Product EAN number    | 5410288422886 |

## HSX Syl-Line

HSXSYL LED NW DALI 1720 WB


0042288

|                                       |                |
|---------------------------------------|----------------|
| Packaging single length / height (cm) | 180.0          |
| Packaging single width (cm)           | 17.0           |
| Packaging single depth (cm)           | 15.0           |
| DUN14 (outer)                         | 05410288422886 |
| Units per outer package               | 1              |
| Packaging outer length / height (cm)  | 180.0          |
| Packaging outer width (cm)            | 17.0           |
| Packaging outer depth (cm)            | 15.0           |

### Safety data

|                                  |        |
|----------------------------------|--------|
| Optimal operating condition (°C) | -10-25 |
|----------------------------------|--------|

## PHOTOMETRY

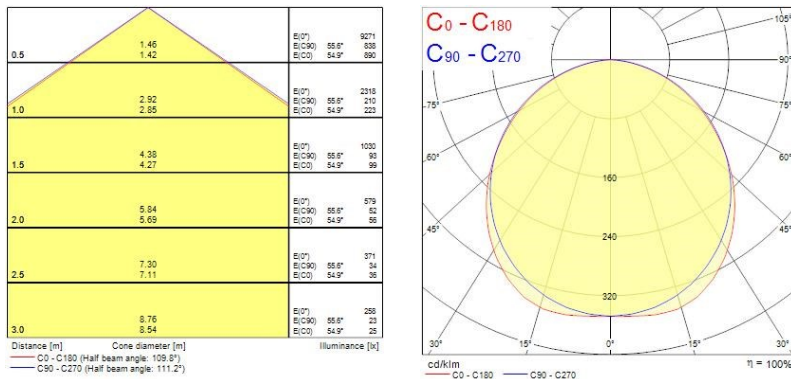

## TECHNICAL DRAWINGS

