

Myriad Pendant Black - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED BLACK
2050695



Product features

- High-end architectural (4000K) neutral white LED pendant with non dimmable driver and remote gear housing, finished in a black finish (RAL9005)



PRODUCT OVERVIEW

| | |
|-----------------------------|---|
| Product name | MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED BLACK |
| Technology | LED |
| Mount | Ceiling surface mounting |
| Environment | Indoor |
| General application | Hospitality, Office, Retail, Residential & Consumer |
| ETIM Class | EC001743 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 1093 |
| Luminaire efficacy (lm/W) | 109.3 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Beam Angle (°) | 30 |
| Total power consumption (W) | 10 |
| Electrical protection | Class II |

Myriad Pendant Black - Remote Gear

MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED BLACK
2050695

| | |
|-----------------------|---------------|
| Control gear mounting | Remote |
| Dimmable | No |
| Housing colour | Black |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768506958 |

DATA TABLE

General data

| | |
|---|---|
| Product name | MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED BLACK |
| Technology | LED |
| Mount | Ceiling surface mounting |
| Environment | Indoor |
| General application | Hospitality, Office, Retail, Residential & Consumer |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001743 |
| Warranty | 5 years |

Optical data

| | |
|----------------------------|---------------|
| Fixture luminous flux (lm) | 1093 |
| Luminaire efficacy (lm/W) | 109.3 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Adjustable chromaticity | N |
| Beam Angle (°) | 30 |
| Distribution type | Symmetric |

Electrical data

| | |
|--|-----------|
| Total power consumption (W) | 10 |
| Mains voltage (V) | 220-240V~ |
| Electrical protection | Class II |
| Control gear mounting | Remote |
| Transformer required | Yes |
| Dimmable | No |
| Drive current (mA) | 250 |
| Energy Efficiency Class (A->G) of contained light source | D |
| Nominal Frequency (Hz) | 50/60Hz |

Lifetime data

| | |
|------------------|-------|
| Lifespan L70 B50 | 50000 |
|------------------|-------|

Physical data

| | |
|----------------|-------|
| Housing colour | Black |
| IP rating | IP20 |

Myriad Pendant Black - Remote Gear


MYRIAD PENDANT 4000K REMOTE GEAR SWITCHED BLACK
2050695

| | |
|-------------------------------|------|
| IK rating | IK02 |
| Nominal Product Length (mm) | 75 |
| Nominal Product Width (mm) | 75 |
| Nominal Product Height (mm) | 129 |
| Nominal Product Diameter (mm) | 75 |
| Max. Lamp Diameter (mm) - D | 75 |
| Weight (kg) | 0.45 |

Packaging

| | |
|---------------------------------------|---------------|
| Single packaging type | Carton |
| Product EAN number | 5025768506958 |
| Packaging single length / height (cm) | 17.5 |
| Packaging single width (cm) | 15.0 |
| Packaging single depth (cm) | 17.5 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 17.5 |
| Packaging outer width (cm) | 15.0 |
| Packaging outer depth (cm) | 17.5 |

PHOTOMETRY

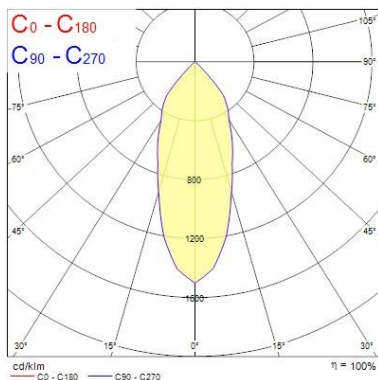

| Distance [m] | Cone diameter [m] | E ₀ [lx] | E _{1/2} [lx] | E _{0.5} [lx] |
|--------------|-------------------|---------------------|-----------------------|-----------------------|
| 0.5 | 0.36 | 6987 | 19.8° | 2751 |
| 1.0 | 0.71 | 1642 | 19.8° | 688 |
| 1.5 | 1.07 | 730 | 19.8° | 306 |
| 2.0 | 1.42 | 410 | 19.8° | 172 |
| 2.5 | 1.78 | 263 | 19.8° | 110 |
| 3.0 | 2.14 | 182 | 19.8° | 78 |

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 99.2°)

TECHNICAL DRAWINGS

