

## Sterling Bulkhead - LED

*Sterling Bulkhead 3000K Black*  
4054984



### PRODUCT OVERVIEW

Product name	Sterling Bulkhead 3000K Black
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
Colour temperature (K)	3000
Control gear mounting	Integral
Housing colour	Black
IP rating	IP55
IK rating	IK09
Product EAN number	5026524549844

### DATA TABLE

#### General data

Product name	Sterling Bulkhead 3000K Black
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892

#### Optical data

Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Adjustable chromaticity	N
Distribution type	Symmetric

#### Electrical data

Mains voltage (V)	230V~
Control gear mounting	Integral

## Sterling Bulkhead - LED

*Sterling Bulkhead 3000K Black*  
4054984

Transformer required	Yes
Drive current (mA)	350



### Physical data

Housing colour	Black
IP rating	IP55
IK rating	IK09
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Height (mm)	128
Max. Lamp Diameter (mm) - D	350
Weight (kg)	3.4

### Packaging

Single packaging type	Carton
Product EAN number	5026524549844
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

## PHOTOMETRY

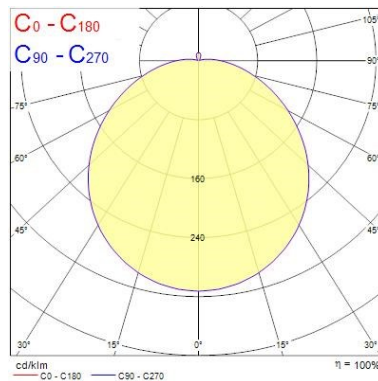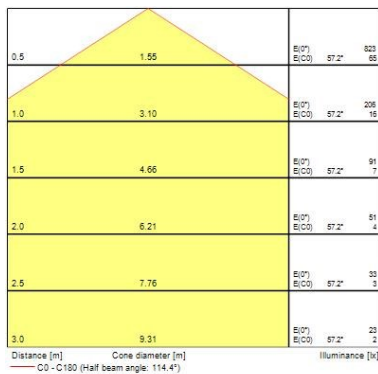


## Sterling Bulkhead - LED

*Sterling Bulkhead 3000K Black*  
4054984

0.5	1.54	E(0°) E(C0)	97.0°	1541 124
1.0	3.08	E(0°) E(C0)	97.0°	385 31
1.5	4.62	E(0°) E(C0)	97.0°	171 14
2.0	6.16	E(0°) E(C0)	97.0°	96 8
2.5	7.70	E(0°) E(C0)	97.0°	62 5
3.0	9.24	E(0°) E(C0)	97.0°	43 3

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 114.0°)

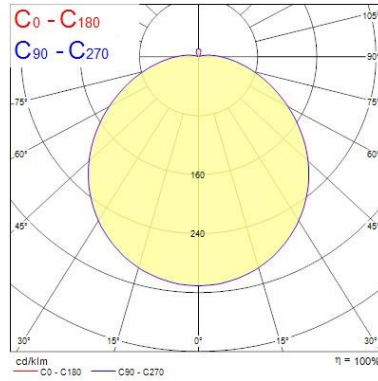

## TECHNICAL DRAWINGS

