

START Panel Flat 1200x300

START FLAT PANEL LED 1200 WW
0047439



Product features

- Edge lit LED flat panel. 45 W, Warm white, 3000 K, 3600 lumens, 80 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 1195 x 295 mm




PRODUCT OVERVIEW

Product name	START FLAT PANEL LED 1200 WW
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4274377
E-number SE	7013620
Warranty	5 years
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	80
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	45
Electrical protection	Class II
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK05
Product EAN number	5410288474397

PHOTOMETRY

START Panel Flat 1200x300
START FLAT PANEL LED 1200 WW
0047439

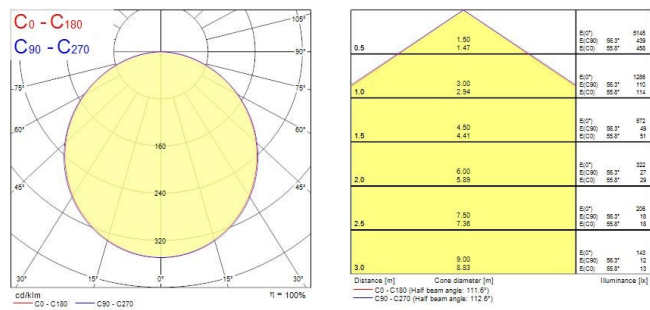

TECHNICAL DRAWINGS

