

## Start Highbay


START Highbay IP65 1-10V 26000lm 840 WB

0039349



### Product features

- START Highbay, includes 1 m cables, black aluminium housing, 26,000 Lm, 200 W, 130 Lm/W, 4000 K, drive current: 5000 mA, CRI 80, 90° beam angle, 1-10 V dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 339 x 194 mm, 1 m mains cable, 1 m control cable, 1.2 m chain length including hooks








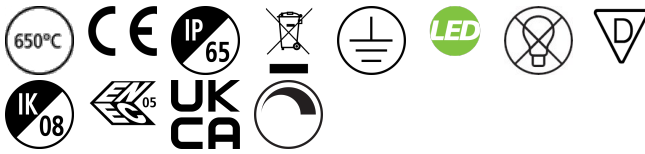


## PRODUCT OVERVIEW

Product name	START Highbay IP65 1-10V 26000lm 840 WB
Technology	LED
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4306963
E-number SE	7214417
Warranty	5 years
Fixture luminous flux (lm)	26000
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	200
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288393490

## PHOTOMETRY

## Start Highbay START Highbay IP65 1-10V 26000lm 840 WB 0039349

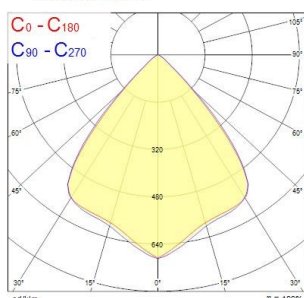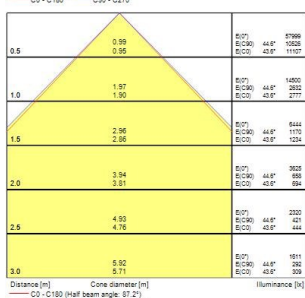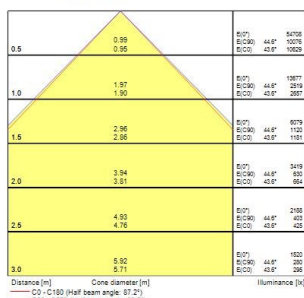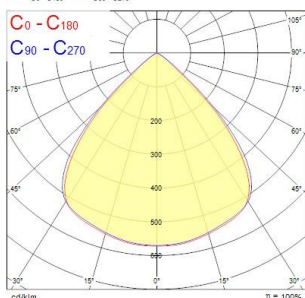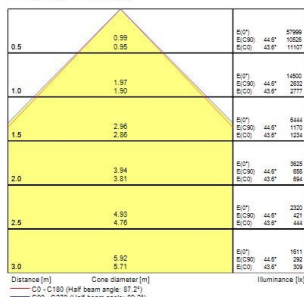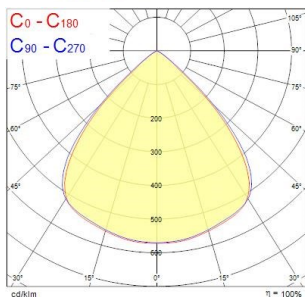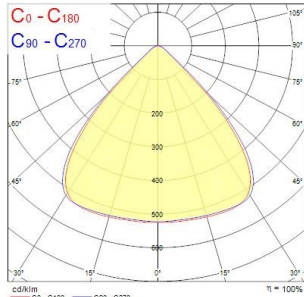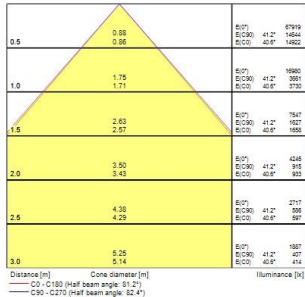

### TECHNICAL DRAWINGS

