


Myriad Pendant Black - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
2049580



Product features

- High-end architectural (4000K) neutral white LED pendant with Phase dimmable driver and surface mounted housing, finished in a black finish (RAL9005)

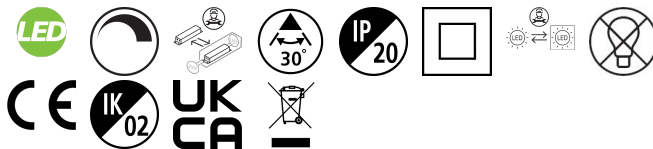

PRODUCT OVERVIEW

Product name	MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001743
E-number SE	7561425
E-number Norway	3290213
Warranty	5 years
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	Yes
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495801

DATA TABLE

General data

Product name	MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
--------------	--

Myriad Pendant Black - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
2049580

Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
E-number SE	7561425
E-number Norway	3290213
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Dimmable	Yes
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	50000
------------------	-------

Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	75
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.95

Packaging


Single packaging type	Carton
-----------------------	--------

Myriad Pendant Black - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
2049580

Product EAN number	5025768495801
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

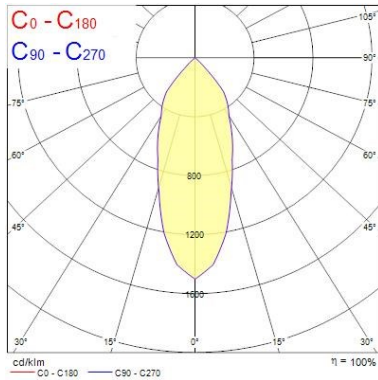

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]
0.5	0.36	6587	2751
1.0	0.71	1642	658
1.5	1.07	730	308
2.0	1.42	410	172
2.5	1.78	263	110
3.0	2.14	152	78

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 39.2°)

TECHNICAL DRAWINGS

