


Myriad Pendant Black - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK 2049580



Product features

- High-end architectural (4000K) neutral white LED pendant with Phase dimmable driver and surface mounted housing, finished in a black finish (RAL9005)

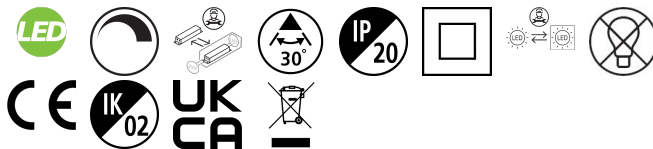


PRODUCT OVERVIEW

Product name	MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001743
E-number SE	7561425
E-number Norway	3290213
Warranty	5 years
Fixture luminous flux (lm)	1093
Luminaire efficacy (lm/W)	109.3
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	Yes
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495801

PHOTOMETRY

Myriad Pendant Black - Surface Mounted

MYRIAD PENDANT 4000K SURFACE MTD PHASE DIM BLACK
2049580

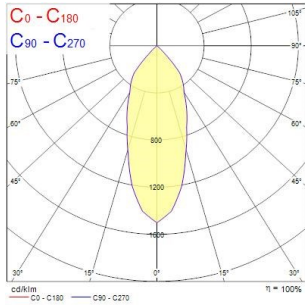

0.5	0.36	E(0°) E(C0)	19.8°	5887 2731
1.0	0.71	E(0°) E(C0)	19.8°	1462 660
1.5	1.07	E(0°) E(C0)	19.8°	730 308
2.0	1.42	E(0°) E(C0)	19.8°	410 172
2.5	1.78	E(0°) E(C0)	19.8°	283 119
3.0	2.14	E(0°) E(C0)	19.8°	192 79

Distance [m] Cone diameter [m] Illuminance [lx]

C0 - C180 (Half beam angle: 39.2°)

TECHNICAL DRAWINGS

