

START eco Downlight 5in1 55-250

START eco Downlight 5in1 55-250 1900LM
0053415



Product features

- START eco Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver. Colour temperature (3000K, 4000K and 6500K) can be adjusted by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 55mm to 250mm. 18W, 1900lm, 106lm/W.



PRODUCT OVERVIEW

Product name	START eco Downlight 5in1 55-250 1900LM
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278102
Warranty	3 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	106
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Product EAN number	5410288534152

DATA TABLE

General data

Product name	START eco Downlight 5in1 55-250 1900LM
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Residential & Consumer

START eco Downlight 5in1 55-250

START eco Downlight 5in1 55-250 1900LM
0053415

Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278102
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	106
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	18
Mains voltage (V)	220-240V~
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	22
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	190
Inrush Current (A)	25
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	71
Max. Luminaires per 13A C Breaker	93
Max. Luminaires per 16A C Breaker	114
Max. Luminaires per 20A C Breaker	143

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	292
Nominal Product Width (mm)	292
Nominal Product Height (mm)	15
Nominal Product Diameter (mm)	290

START eco Downlight 5in1 55-250

START eco Downlight 5in1 55-250 1900LM
0053415

Cutout Dimensions (W x L in mm or Diameter in mm)	55-250
Weight (kg)	0.72
Recessed Depth (mm)	50





Packaging

Single packaging type	Carton
Product EAN number	5410288534152
Packaging single length / height (cm)	31.2
Packaging single width (cm)	30.0
Packaging single depth (cm)	4.8
DUN14 (outer)	15410288534159
Units per outer package	8
Packaging outer length / height (cm)	41.4
Packaging outer width (cm)	33.5
Packaging outer depth (cm)	32.3

Safety data



Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

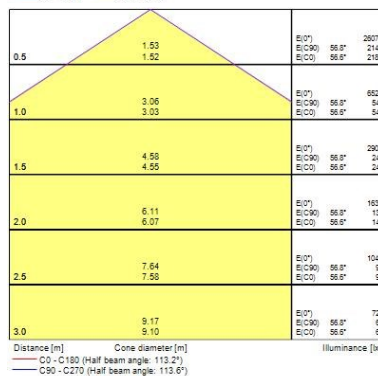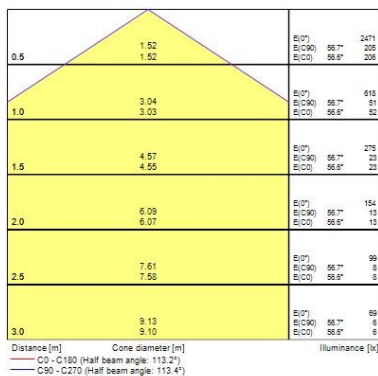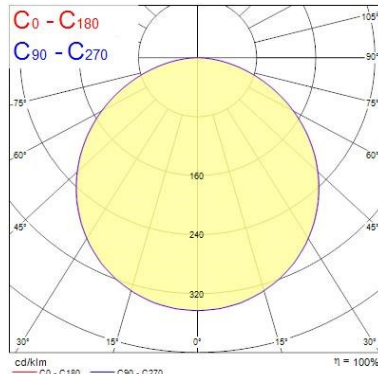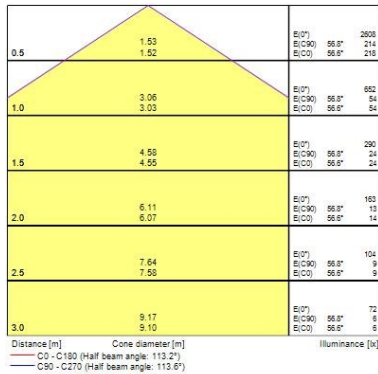

START eco Downlight 5in1 55-250

START eco Downlight 5in1 55-250 1900LM
0053415

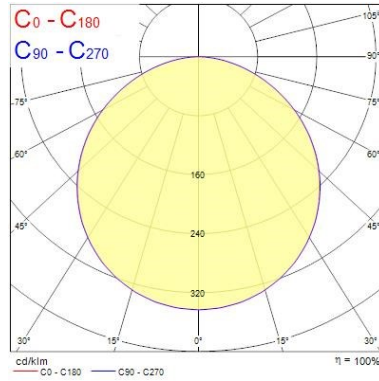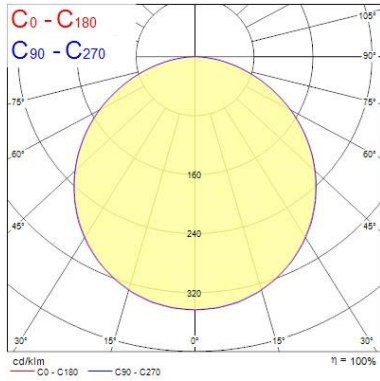

TECHNICAL DRAWINGS

