

## T5 FHO Luxline Plus

80W/T5/830 FHO

0002784



### Product features



## PRODUCT OVERVIEW

Product name	80W/T5/830 FHO
Technology	Fluorescent
Watt (Rated) (W)	80
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944483
E-number SE	8356564
E-number Norway	3843428
Luminous flux (lm)	6350
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	83
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	80.00
Product Voltage (V)	152
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027845

## DATA TABLE

### General data

Product name	80W/T5/830 FHO
Technology	Fluorescent
Watt (Rated) (W)	80
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus

## T5 FHO Luxline Plus

80W/T5/830 FHO  
0002784

Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944483
E-number SE	8356564
E-number Norway	3843428

### Optical data

Luminous flux (lm)	6350
Luminous flux (Rated) (lm)	6350
Luminous flux (Nominal) at 35°C (lm)	7000
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	83
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

### Electrical data

Wattage (W)	80.00
Watt (Rated) - High frequency (W)	76.80
Current (A)	0.530
Product Voltage (V)	152
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	530
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	85

## T5 FHO Luxline Plus

80W/T5/830 FHO  
0002784

### Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

### Physical data

Nominal Product Length (mm)	1450.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	1449.0
Length base to pin Min-Max (mm) - B	1453.7-1456.1
Max. Lamp Length (mm) - C/L	1463.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.109

### Packaging


Single packaging type	Carton
Product EAN number	5410288027845
Packaging single length / height (cm)	146.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027842
Units per outer package	25
Packaging outer length / height (cm)	148.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

### Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

## PHOTOMETRY


T5 FHO Luxline Plus  
80W/T5/830 FHO  
0002784

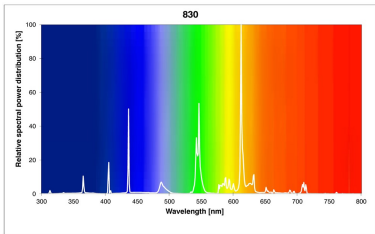

TECHNICAL DRAWINGS



0002784

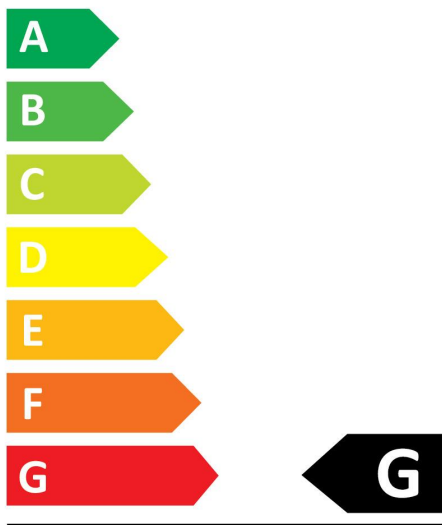


80  
kWh/1000h



2019/2015

T5 FHO Luxline Plus  
80W/T5/830 FHO  
0002784

  
**SYLVANIA**  
0002784

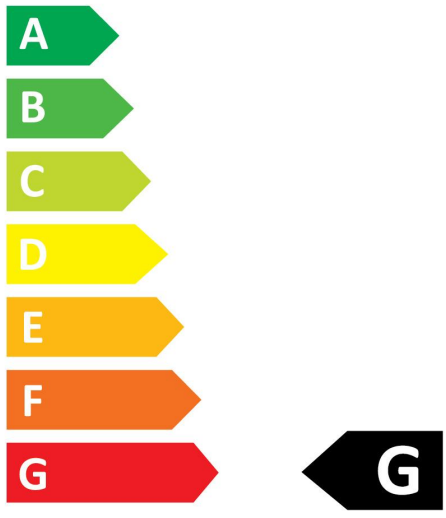

**80**  
kWh/1000h

