

Glace

GLACE 989LM HIGH EFFICIENCY 840 DALI EM3

2059791



Product features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, integral 3 hour emergency, aluminium housing with acrylic opal diffuser, 989lm, 13W, 76lm/W, 4000K, 500mA, 85 CRI, DALI, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2.3kg, opal diffuser, Class I, 230-240V




PRODUCT OVERVIEW

| | |
|--------------------------------|--|
| Product name | GLACE 989LM HIGH EFFICIENCY 840 DALI EM3 |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling surface mounting |
| Environment | Indoor |
| General application | Hospitality |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Luminous flux (lm) | 989 |
| Luminaire efficacy (lm/W) | 76.07 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Glare control | < 19 |
| Total power consumption (W) | 13 |
| Electrical protection | Class I |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768597918 |
| Luminous flux (emergency) (lm) | 197 |

PHOTOMETRY

Glace

GLACE 989LM HIGH EFFICIENCY 840 DALI EM3
2059791

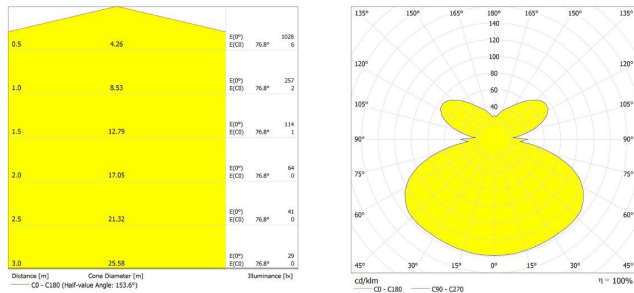

TECHNICAL DRAWINGS

