



Product features















PRODUCT OVERVIEW

Product name	Lynx QE 16W GR10Q 827
Technology	Compact Fluorescent
Watt (Rated) (W)	16
Lamp shape	Other
Туре	Lynx QE
Cap/Base	GR10q
Lamp finish	Frosted/Coated
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4940110
E-number SE	8357341
E-number Norway	3845317
Luminous flux (Im)	1050
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	16
Product Voltage (V)	84
Dimmable	Yes
Average life (Nominal) (h)	10000
Product EAN number	5410288249896

DATA TABLE

Cor	oral	l data
CJEI	ierai	เ แลเล

Product name	Lynx QE 16W GR10Q 827
Technology	Compact Fluorescent
Watt (Rated) (W)	16



Lamp shape	Other
Туре	Lynx QE
Cap/Base	GR10q
Lamp finish	Frosted/Coated
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4940110
E-number SE	8357341
E-number Norway	3845317
Optical data	
Luminous flux (lm)	1050
Luminous flux (Rated) (Im)	1050
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2700
Light colour	Homelight
Colour Code	827
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h	85
Rated lumen maint. factor (%) at 6000 h 50Hz	82
Rated lumen maint. factor (%) at 8000 h 50Hz	80
Electrical data	
	16
Wattage (W)	<2
Starting time (max) (s) Warm-up time to 60% of full light (max)	60
(s)	00
Current (A)	0.18
Product Voltage (V)	84
Ignition voltage (V)	450
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	18
Lifetime data	
	10000
Average life (Nominal) (h)	10000
Average life (Rated) (h)	10000
Rated survival factor (%) at 2000 h 50Hz	99
Rated survival factor (%) at 4000 h 50Hz	98
Rated survival factor (%) at 6000 h 50Hz	94
Rated survival factor (%) at 8000 h 50Hz	88



Physical data

Nominal Product Length (mm)	136
Nominal Product Width (mm)	133
Nominal Product Height (mm)	26
Max. Length base to base (mm) - A	26
Max. Lamp Length (mm) - C/L	138
Max. Lamp Diameter (mm) - D	13.7
Weight (kg)	0.065


Packaging

Single packaging type	Carton
Product EAN number	5410288249896
Packaging single length / height (cm)	14.1
Packaging single width (cm)	2.4
Packaging single depth (cm)	13.7
DUN14 (outer)	15410288249893
Units per outer package	10
Packaging outer length / height (cm)	27.8
Packaging outer width (cm)	17.1
Packaging outer depth (cm)	15.7

Safety data


Lamp mercury content (mg)	2.50
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Suitable for accent lighting	N/A

PHOTOMETRY



TECHNICAL DRAWINGS



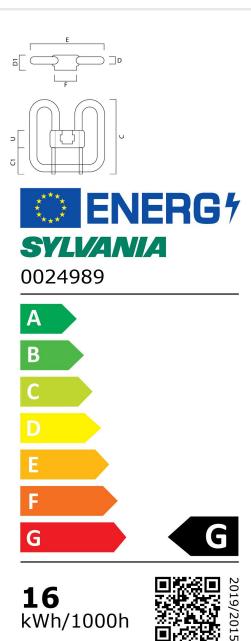









16 kWh/1000h

