

Sylproof Superia LED G3 fixed output

SYLPROOF SUPERIA LED G3 600mm Twin 4K

0048690



Product features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, Polycarbonate diffuser, Non dimmable, 4000K, CRI80, 2700 lm, 19 W, 140 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.




PRODUCT OVERVIEW

| | |
|---------------------------------|---------------------------------------|
| Product name | SYLPROOF SUPERIA LED G3 600mm Twin 4K |
| Technology | LED |
| Housing | Polyester |
| Mount | Ceiling surface mounting |
| General application | Logistics & Industry |
| ETIM Class | EC000109 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 2700 |
| Luminaire efficacy (lm/W) | 140 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 100 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 19 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Dimmable | No |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288486901 |

PHOTOMETRY

Sylproof Superia LED G3 fixed output
SYLPROOF SUPERIA LED G3 600mm Twin 4K
0048690

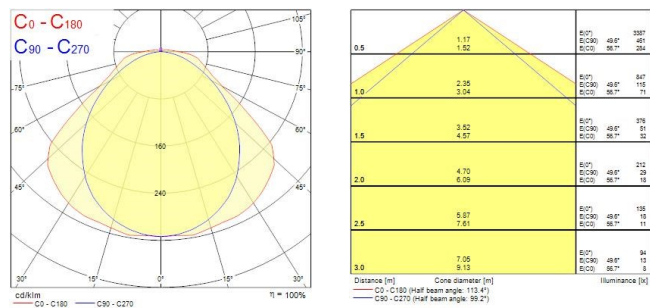

TECHNICAL DRAWINGS

