

SylBatten LED - DALI

SYLBATTEN LED 1505MM 8000LM 6000K DALI (TP5)

0045199



Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP5 = 5 core), sheet steel, 8724LM, 79W, 110lm/W, 6000K, drive current: 450mA, CRI 80, 138° wide beam angle, DALI dimmable, IP20, IK07, 50,000 hrs (L70), (LxWxH) 1505x66x76mm, 5 step MacAdam ellipse, 3.7kg, white RAL 9016, Class 1, 220-240V, energy class: A++, A+, A.



PRODUCT OVERVIEW

Product name	SYLBATTEN LED 1505MM 8000LM 6000K DALI (TP5)
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4274279
Fixture luminous flux (lm)	8724
Luminaire efficacy (lm/W)	110.43
LOR (%)	100
Colour temperature (K)	6000
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	138
Glare control	< 32
Photobiological Risk Group	RG0
Total power consumption (W)	79
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Dimmable	Yes
Minimum dimming level (%)	3
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288451992

SylBatten LED - DALI


SYLBATTEN LED 1505MM 8000LM 6000K DALI (TP5)

0045199

PHOTOMETRY



Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (half beam angle: 100.8°)
 — C90 - C270 (half beam angle: 44.4°)

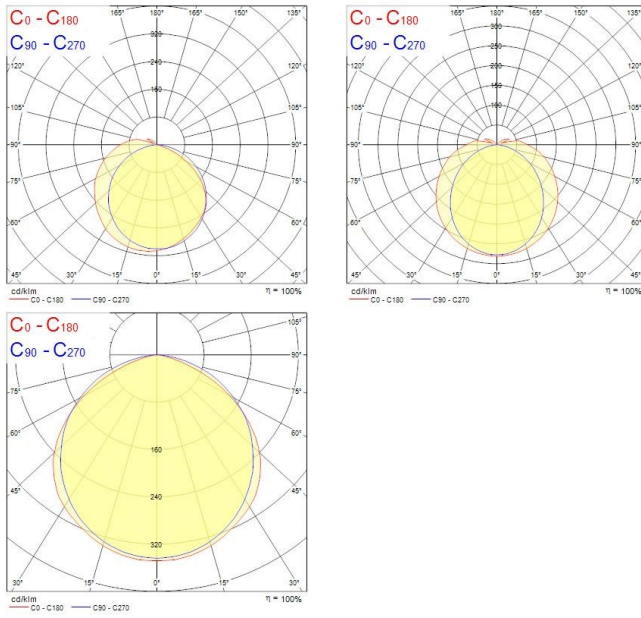

TECHNICAL DRAWINGS

