

Start eco Emergency Downlight

START eco Emergency Spot Manual Test Non Maintained 3h Corridor
0032003



Product features

- Recessed Spot Light used for Emergency application Narrow beam for corridor application





PRODUCT OVERVIEW

Product name	START eco Emergency Spot Manual Test Non Maintained 3h Corridor
Technology	LED
Type	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC001957
Warranty	3 years
Fixture luminous flux (lm)	170
Colour temperature (K)	5000
CRI (Ra)	70
Beam Angle (°)	140 x 90
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	170
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288320038

PHOTOMETRY

Start eco Emergency Downlight *START eco Emergency Spot Manual Test Non Maintained 3h Corridor* 0032003

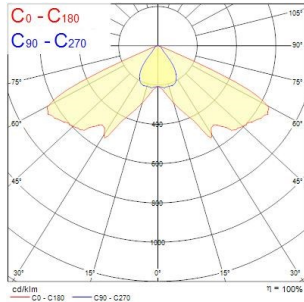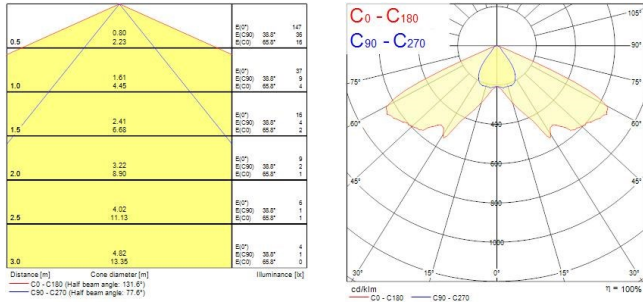

TECHNICAL DRAWINGS

