

T8 Luxline Plus

F18W/T8/835
0000580



Product features



PRODUCT OVERVIEW

Product name	F18W/T8/835
Technology	Fluorescent
Watt (Rated) (W)	18.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940135
E-number SE	8356582
Luminous flux (lm)	1350
Colour temperature (K)	3500
Light colour	White
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	18.00
Product Voltage (V)	57
Dimmable	Yes
Average life (Nominal) (h)	20000
Product EAN number	5410288005805

DATA TABLE

General data

Product name	F18W/T8/835
Technology	Fluorescent
Watt (Rated) (W)	18.00
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open

T8 Luxline Plus

F18W/T8/835

0000580

General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940135
E-number SE	8356582

Optical data

Luminous flux (lm)	1350
Luminous flux (Rated) (lm)	1350
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	3500
Light colour	White
Colour Code	835
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.96
Rated lumen maint. factor (%) at 4000 h 50Hz	0.94
Rated lumen maint. factor (%) at 6000 h 50Hz	0.92
Rated lumen maint. factor (%) at 8000 h 50Hz	0.91
Rated lumen maint. factor (%) at 12000 h 50Hz	0.90
Rated lumen maint. factor (%) at 16000 h 50Hz	0.89
Rated lumen maint. factor (%) at 20000 h 50Hz	0.87

Electrical data

Wattage (W)	18.00
Watt (Rated) - High frequency (W)	16.00
Current (A)	0.370
Mains voltage (V)	220-240V~
Product Voltage (V)	57
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	370
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	22
Nominal Frequency (Hz)	50Hz

Lifetime data

Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000
Rated survival factor (%) at 2000 h 50Hz	0.99

T8 Luxline Plus

F18W/T8/835

0000580

Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.92
Rated survival factor (%) at 16000 h 50Hz	0.80
Rated survival factor (%) at 20000 h 50Hz	0.50

Physical data

Nominal Product Length (mm)	600.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	589.8
Length base to pin Min-Max (mm) - B	594.5-596.9
Max. Lamp Length (mm) - C/L	604.0
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.083


Packaging

Single packaging type	Carton
Product EAN number	5410288005805
Packaging single length / height (cm)	61.0
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.8
DUN14 (outer)	15410288005802
Units per outer package	25
Packaging outer length / height (cm)	63.0
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	15.0

Safety data


Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

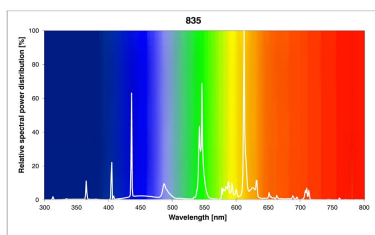

T8 Luxline Plus
F18W/T8/835
0000580

TECHNICAL DRAWINGS



0000580



18
kWh/1000h




2019/2015

SYLVANIA

T8 Luxline Plus
F18W/T8/835
0000580



0000580

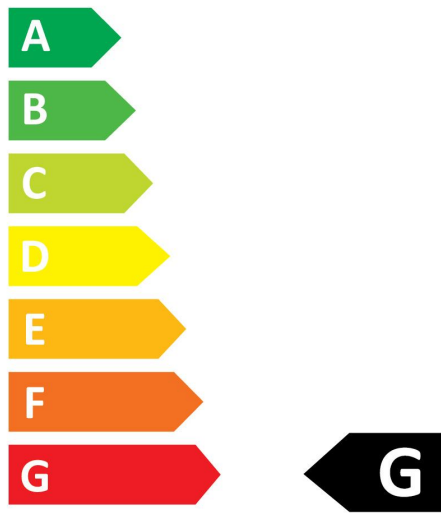

18
kWh/1000h



2019/2015