

SylFast T5

SylFast T16 1x54W G5

0046385



Product features

- T5 fluorescent batten made from roll-formed steel. With punch out conduit holes on both ends and 3 pole terminal block. White body. For use with T5 lamps (ordered separately). IP20. IK02. 220-240V. Class 1. Electronic ballast (non-dimmable).



PRODUCT OVERVIEW

Product name	SylFast T16 1x54W G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	2 years
Light colour	N/A
Total power consumption (W)	60
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288463858

DATA TABLE

General data

Product name	SylFast T16 1x54W G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	2 years

SylFast T5

SylFast T16 1x54W G5
0046385

Optical data

Light colour	N/A
Adjustable chromaticity	N
Distribution type	Symmetric

Electrical data

Total power consumption (W)	60
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	960
Nominal Frequency (Hz)	50/60Hz



Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Weight (kg)	1.588

Packaging

Single packaging type	Plastic
Product EAN number	5410288463858
Packaging single length / height (cm)	123.5
Packaging single width (cm)	5.2
Packaging single depth (cm)	5.3
DUN14 (outer)	15410288463855
Units per outer package	5
Packaging outer length / height (cm)	124.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	16.0

PHOTOMETRY

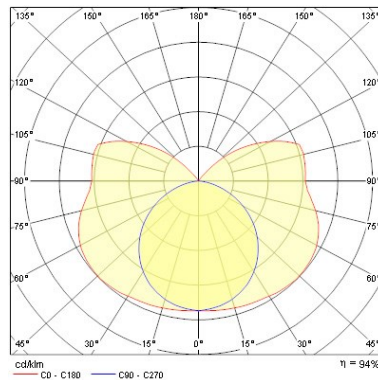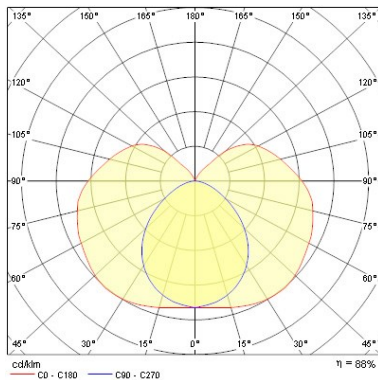

SylFast T5
SylFast T16 1x54W G5
0046385

TECHNICAL DRAWINGS

