

Product features

 HSX Syl-Line LED, Neutral White, 1-10V dimming, 1720mm, Emergency 3 hour maintained, Wide Beam

















PRODUCT OVERVIEW

Product name	HSXSYL LED NW 1-10V 1720 EM WB
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Logistics & Industry, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (Im)	6660
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 19
Total power consumption (W)	75
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288422916
Luminous flux (emergency) (Im)	972



DATA TABLE


General data	
Product name	HSXSYL LED NW 1-10V 1720 EM WB
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Logistics & Industry, Retail
Operating temperature range (°C)	-10°C - 25°C
ETIM Class	EC002892
Warranty	5 years
Optical data	
Fixture luminous flux (lm)	6660
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Glare control	< 19
Emergency duration (h)	3.0
Electrical data	
	75
Total power consumption (W)	220-240V~
Mains voltage (V) Electrical protection	Class I
	Other
Control gear type Transformer required	Yes
Dimmable	Yes
Minimum dimming level (%)	90
Drive current (mA)	350
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Nominal Frequency (Fiz)	30/00112
Physical data	
Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Matt/satinized
Nominal Product Length (mm)	1720
Nominal Product Width (mm)	164
Nominal Product Height (mm)	132
Weight (kg)	6.5



	ka		

Single packaging type	Carton
Product EAN number	5410288422916
Packaging single length / height (cm)	180.0
Packaging single width (cm)	17.0
Packaging single depth (cm)	15.0
DUN14 (outer)	05410288422916
Units per outer package	1
Packaging outer length / height (cm)	180.0
Packaging outer width (cm)	17.0
Packaging outer depth (cm)	15.0
Safety data	
Optimal operating condition (°C)	-10-25

PHOTOMETRY

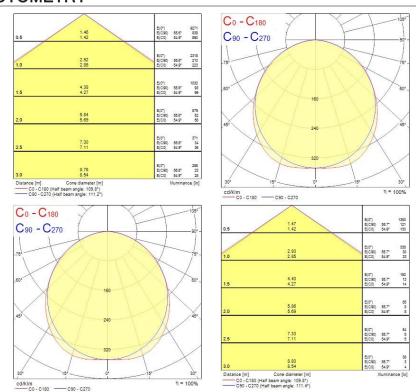

TECHNICAL DRAWINGS



