

## Lynx TE

LYNX-TE 32W/840 FSD  
0027858



### Product features

- Triple bend compact pin-base lamps, - Suitable for operation on electronic ballasts, - Excellent luminous flux, - Excellent colour rendering, - Dimmable with suitable dimmer



## PRODUCT OVERVIEW

Product name	LYNX-TE 32W/840 FSD
Technology	Compact Fluorescent
Watt (Rated) (W)	32
Lamp shape	Other
Type	Lynx TE
Cap/Base	GX24q-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944143
E-number SE	8357435
E-number Norway	3802808
Luminous flux (lm)	2400
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	32
Product Voltage (V)	220
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288278582

## DATA TABLE

### General data

Product name	LYNX-TE 32W/840 FSD
Technology	Compact Fluorescent
Watt (Rated) (W)	32
Lamp shape	Other
Type	Lynx TE

## Lynx TE

*LYNX-TE 32W/840 FSD*  
0027858

Cap/Base	GX24q-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944143
E-number SE	8357435
E-number Norway	3802808

### Optical data

Luminous flux (lm)	2400
Luminous flux (Rated) (lm)	2400
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	75
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	84
Rated lumen maint. factor (%) at 8000 h 50Hz	81

### Electrical data

Wattage (W)	32
Starting time (max) (s)	0.1 Sec
Current (A)	0.32
Product Voltage (V)	220
Control gear required	Yes
Transformer required	No
Dimmable	No
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	31

### Lifetime data

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	70

## Lynx TE

*LYNX-TE 32W/840 FSD*  
0027858

### Physical data

Nominal Product Length (mm)	156
Nominal Product Diameter (mm)	49
Max. Length base to base (mm) - A	157
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.081


### Packaging

Single packaging type	Carton
Product EAN number	5410288278582
Packaging single length / height (cm)	4.8
Packaging single width (cm)	4.5
Packaging single depth (cm)	15.6
DUN14 (outer)	15410288278589
Units per outer package	10
Packaging outer length / height (cm)	24.7
Packaging outer width (cm)	10.9
Packaging outer depth (cm)	17.5


### Safety data

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes


## PHOTOMETRY

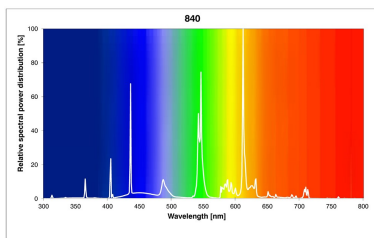

## TECHNICAL DRAWINGS



Lynx TE  
LYNX-TE 32W/840 FSD  
0027858

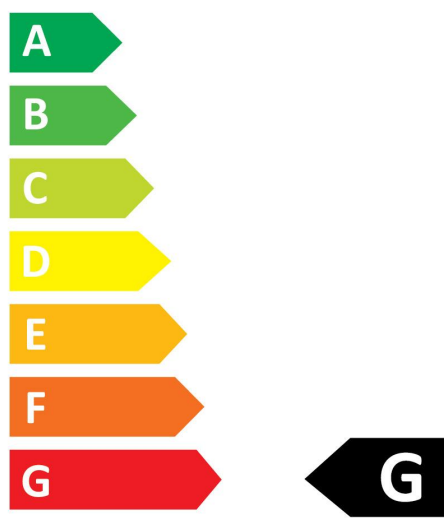

**32**  
kWh/1000h




2019/2015

# SYLVANIA

Lynx TE  
LYNX-TE 32W/840 FSD  
0027858



0027858

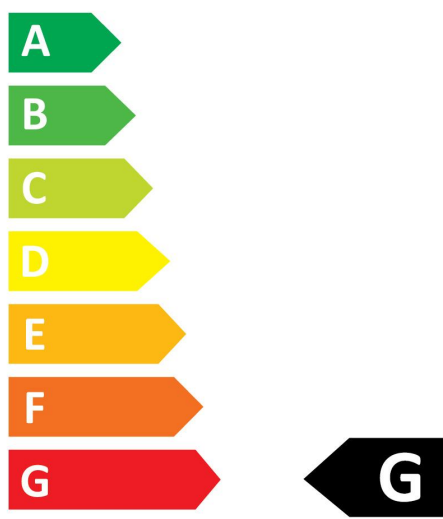

**32**  
kWh/1000h



2019/2015