

## SylFast T5

SylFast T16 1x39W G5

0046383



### Product features

- T5 fluorescent batten made from roll-formed steel. With punch out conduit holes on both ends and 3 pole terminal block. White body. For use with T5 lamps (ordered separately). IP20. IK02. 220-240V. Class 1. Electronic ballast (non-dimmable).



## PRODUCT OVERVIEW

Product name	SylFast T16 1x39W G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	2 years
Light colour	N/A
Total power consumption (W)	43
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288463834

## DATA TABLE

### General data

Product name	SylFast T16 1x39W G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	2 years

## SylFast T5

SylFast T16 1x39W G5  
0046383

### Optical data

Light colour	N/A
Adjustable chromaticity	N
Distribution type	Symmetric

### Electrical data

Total power consumption (W)	43
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	960
Nominal Frequency (Hz)	50/60Hz



### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Weight (kg)	0.968

### Packaging

Single packaging type	Plastic
Product EAN number	5410288463834
Packaging single length / height (cm)	93.0
Packaging single width (cm)	5.2
Packaging single depth (cm)	5.3
DUN14 (outer)	15410288463831
Units per outer package	5
Packaging outer length / height (cm)	93.5
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	16.0

## PHOTOMETRY

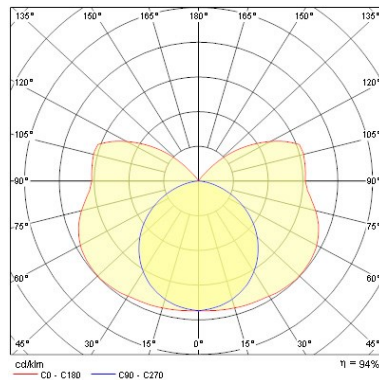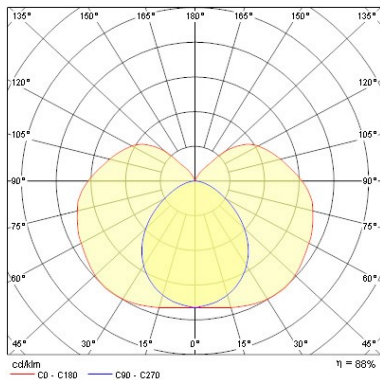

SylFast T5  
*SylFast T16 1x39W G5*  
0046383

---

## TECHNICAL DRAWINGS

---

