

Start Spot Scoop


START SPOT SCOOP 3100LM 930 MB WHITE

0060584



Product features

- Recessed Adjustable Accent Downlight, integrated LED, die cast aluminium body, Ø155mm cut-out, CCT 3000K, SDCM<3, CRI90, 3100lm, total power consumption 35W, resulting in 89lm/W.

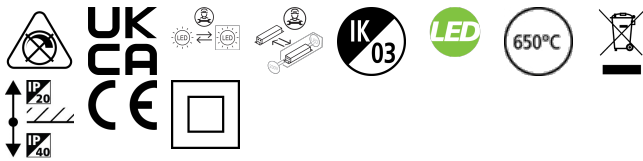


PRODUCT OVERVIEW

Product name	START SPOT SCOOP 3100LM 930 MB WHITE
Technology	LED
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276981
Warranty	5 years
Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	90
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	32
Photobiological Risk Group	RG1
Total power consumption (W)	35
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288605845

PHOTOMETRY

Start Spot Scoop *START SPOT SCOOP 3100LM 930 MB WHITE* 0060584



Distance [m]	Cone diameter [m]	E _{0°} [lx]	E _{C90} [lx]	E _{C180} [lx]
0.5	0.25 0.25	2368	1040	1040
1.0	0.50 0.50	597	260	260
1.5	0.84 0.84	264	110	110
2.0	1.12 1.12	168	68	68
2.5	1.40 1.41	94	37	37
3.0	1.68 1.68	66	26	26

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 31.4°)
 — C90 - C270 (Half beam angle: 31.2°)

TECHNICAL DRAWINGS

