

Sylproof Tubular - Electronic

Sylproof Tubular IP66 228 EB 840 RAP
0042404



Product features

-




PRODUCT OVERVIEW

Product name	Sylproof Tubular IP66 228 EB 840 RAP
Technology	Fluorescent
Cap/Base	G5
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
Warranty	2 years
Fixture luminous flux (lm)	4141
Luminaire efficacy (lm/W)	77
LOR (%)	80
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Total power consumption (W)	54
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK10
Product EAN number	5410288424040
Light source included	0002767

PHOTOMETRY

Sylproof Tubular - Electronic

Sylproof Tubular IP66 228 EB 840 RAP
0042404

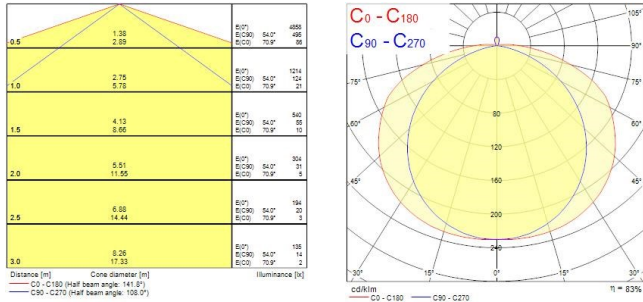

TECHNICAL DRAWINGS

