

## Start Surface Wall Square IP54

*START Surface Wall Square Deco IP54 430lm 830 BLK*

0047056



### Product features

- Exterior surface wall light luminaire, Square shape, Black aluminium - RAL9005, 430lm, 8W, 54lm/W, 3000K, Driver current: 350mA, CRI80, 220-240V, IP54, IK07, 50.000 hrs (L70), (HxWxL) 54x130x166mm, Class I, Energy class: A++, A+, A



## PRODUCT OVERVIEW

Product name	START Surface Wall Square Deco IP54 430lm 830 BLK
Technology	LED
Housing	Aluminium
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4579453
Warranty	5 years
Fixture luminous flux (lm)	430
Luminaire efficacy (lm/W)	54
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Total power consumption (W)	8
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	High (>40%)
Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Product EAN number	5410288470566

## DATA TABLE

### General data

Product name	START Surface Wall Square Deco IP54 430lm 830 BLK
Technology	LED
Housing	Aluminium
General application	Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25

## Start Surface Wall Square IP54

*START Surface Wall Square Deco IP54 430lm 830 BLK*  
0047056

ETIM Class	EC002892
E-number FI	4579453
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	430
Luminaire efficacy (lm/W)	54
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	8
Current (A)	0.04
Mains voltage (V)	220-240V~
Lamp power factor	0.84
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	15.0
Electrical protection	Class I
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	10
Inrush Duration (µs)	200
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	High (>40%)
Max. Luminaires per 10A C Breaker	80
Max. Luminaires per 13A C Breaker	115
Max. Luminaires per 16A C Breaker	125
Max. Luminaires per 20A C Breaker	160

### Lifetime data

Lifespan L70 B50	50000
Lifespan L80 B50	35000

### Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	167
Nominal Product Width (mm)	130
Nominal Product Height (mm)	54
Weight (kg)	0.6

### Packaging

## Start Surface Wall Square IP54


START Surface Wall Square Deco IP54 430lm 830 BLK  
0047056

Single packaging type	Carton
Product EAN number	5410288470566
Packaging single length / height (cm)	14.0
Packaging single width (cm)	6.5
Packaging single depth (cm)	18.0
DUN14 (outer)	15410288470563
Units per outer package	10
Packaging outer length / height (cm)	35.5
Packaging outer width (cm)	30.0
Packaging outer depth (cm)	19.5

### Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

## PHOTOMETRY

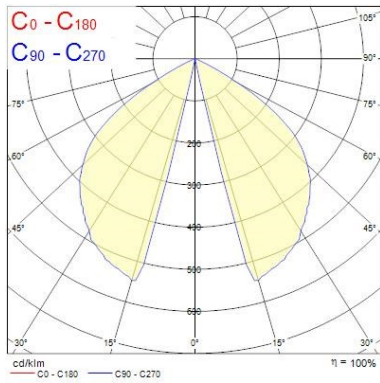

## TECHNICAL DRAWINGS

