

## Syl-Line electrical unit

SYL-LINE GT3R 4K DALI NR WH EMPRO  
0042139



### Product features

- Syl-Line LED Gear Tray, 4000K Neutral White, Narrow Beam, White, Emergency DALI Inverter Feedback



## PRODUCT OVERVIEW

Product name	SYL-LINE GT3R 4K DALI NR WH EMPRO
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Environment	Interior
General application	Logistics & Industry, Retail
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	6476
Luminous flux (lm)	6476
Luminaire efficacy (lm/W)	119
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	54
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	99
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288421391

## DATA TABLE

### General data

Product name	SYL-LINE GT3R 4K DALI NR WH EMPRO
Technology	LED

## Syl-Line electrical unit

*SYL-LINE GT3R 4K DALI NR WH EMPRO*  
0042139

Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Environment	Interior
General application	Logistics & Industry, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	6476
Luminous flux (lm)	6476
Luminaire efficacy (lm/W)	119
Ambient temperature for maximum luminous flux (°C)	25
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Adjustable chromaticity	N
Photobiological Risk Group	RG0
Emergency duration (h)	3.0

### Electrical data

Total power consumption (W)	54
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	Yes
Minimum dimming level (%)	99
Drive current (mA)	250
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B10	60000

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1720
Nominal Product Width (mm)	70





## Syl-Line electrical unit SYL-LINE GT3R 4K DALI NR WH EMPRO 0042139

Nominal Product Height (mm)	82
Weight (kg)	2.54

### Packaging

Single packaging type	Carton
Product EAN number	5410288421391
Packaging single length / height (cm)	171.0
Packaging single width (cm)	8.0
Packaging single depth (cm)	4.0
DUN14 (outer)	15410288421398
Units per outer package	1
Packaging outer length / height (cm)	171.0
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	4.0

## PHOTOMETRY

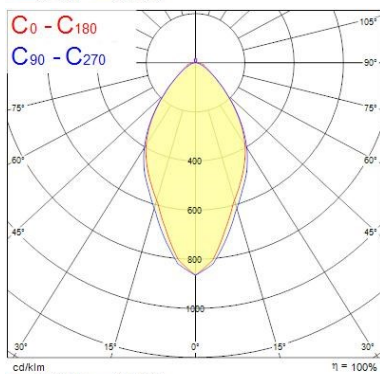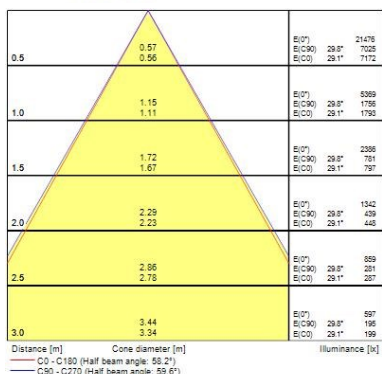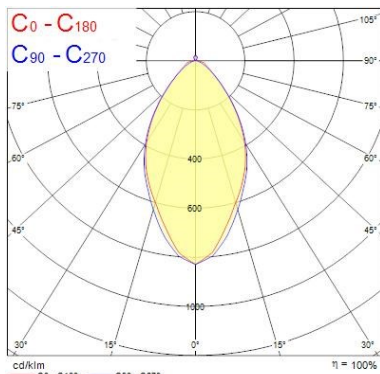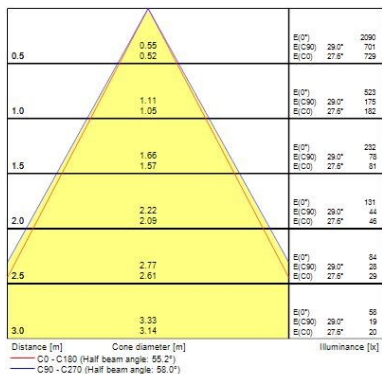

## TECHNICAL DRAWINGS

