


START eco Panel Flat UGR19 625x625

START eco Panel Flat UGR19 625x625 3000lm 840
0047367



Product features

- Competitive, edge lit LED flat low glare panel (UGR<19). Low Flicker, 30 W, Neutral White, 4000 K, 3000 lumens, 100 lm/W, 30000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 8.5 x 621 x 621 mm

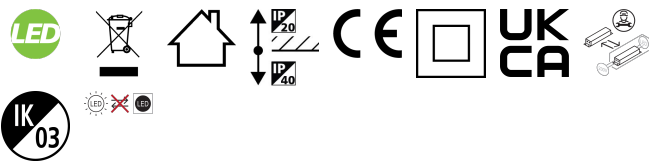


PRODUCT OVERVIEW

Product name	START eco Panel Flat UGR19 625x625 3000lm 840
Technology	LED
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Warranty	3 years
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	80
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	30
Electrical protection	Class II
LED Flickering Rate	Ultra low (5% or less)
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288473673

PHOTOMETRY

START eco Panel Flat UGR19 625x625

START eco Panel Flat UGR19 625x625 3000lm 840
0047367

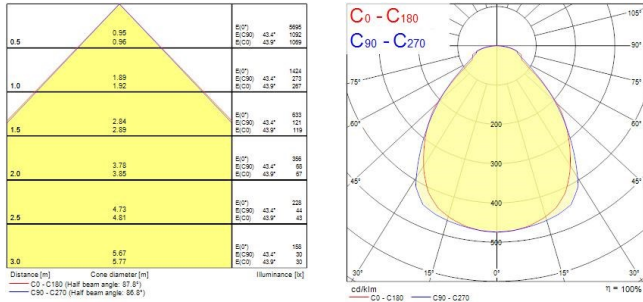

TECHNICAL DRAWINGS

