

## Beacon LED

BEACON 93CRI 4K NARROW BEAM L3 TRAILING EDGE WHITE

2059635



### Product features

- Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 12° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 4000K neutral white, total system power: 21W, total fixture output: 1669lm, luminaire efficacy: 79lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: >72,000 hours at L80B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.



### PRODUCT OVERVIEW

Product name	BEACON 93CRI 4K NARROW BEAM L3 TRAILING EDGE WHITE
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	1669
Luminaire efficacy (lm/W)	79
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	12
Photobiological Risk Group	RG1
Total power consumption (W)	21
Product Voltage (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Minimum dimming level (%)	97
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768596355

## Beacon LED

*BEACON 93CRI 4K NARROW BEAM L3 TRAILING EDGE WHITE*  
2059635

### DATA TABLE

#### General data

<b>Product name</b>	BEACON 93CRI 4K NARROW BEAM L3 TRAILING EDGE WHITE
<b>Technology</b>	LED
<b>Housing</b>	Aluminium
<b>Mount</b>	Track mounting
<b>Environment</b>	Internal
<b>General application</b>	Museums & Galleries, Retail
<b>Performance ambient temperature Tq (°C)</b>	25
<b>ETIM Class</b>	EC001744
<b>Warranty</b>	5 years

#### Optical data

<b>Fixture luminous flux (lm)</b>	1669
<b>Luminaire efficacy (lm/W)</b>	79
<b>LOR (%)</b>	100
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	93
<b>Colour Consistency (SDCM)</b>	3
<b>Adjustable chromaticity</b>	N
<b>Beam Angle (°)</b>	12
<b>Photobiological Risk Group</b>	RG1

#### Electrical data

<b>Total power consumption (W)</b>	21
<b>Mains voltage (V)</b>	220-240V~
<b>Product Voltage (V)</b>	240
<b>Lamp power factor</b>	0.9
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	Electronic ballast
<b>Transformer required</b>	Yes
<b>Minimum dimming level (%)</b>	97
<b>Drive current (mA)</b>	500
<b>Inrush Current (A)</b>	45
<b>Inrush Duration (µs)</b>	20
<b>Glow Wire Test (°C)</b>	650
<b>Energy Efficiency Class (A-&gt;G) of contained light source</b>	E
<b>Nominal Frequency (Hz)</b>	50/60Hz
<b>Max. Luminaires per 10A C Breaker</b>	48
<b>Max. Luminaires per 16A C Breaker</b>	80

#### Lifetime data

<b>Lifespan L70 B50</b>	72000
<b>Lifespan L70 B10</b>	72000

## Beacon LED

BEACON 93CRI 4K NARROW BEAM L3 TRAILING EDGE WHITE  
2059635

Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	44000
Lifespan L90 B20	37000
Lifespan L90 B10	34000


### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Height (mm)	190
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

### Packaging

Single packaging type	Carton
Product EAN number	5025768596355
Packaging single length / height (cm)	16.0
Packaging single width (cm)	17.6
Packaging single depth (cm)	18.2
DUN14 (outer)	05025768596355
Units per outer package	1
Packaging outer length / height (cm)	16.0
Packaging outer width (cm)	17.6
Packaging outer depth (cm)	18.2

## PHOTOMETRY

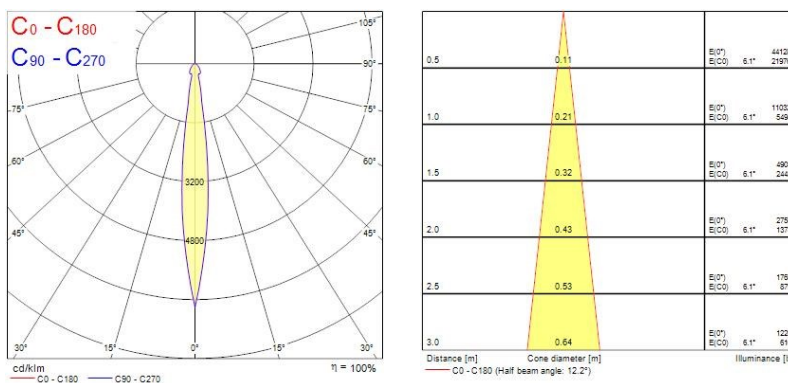

## TECHNICAL DRAWINGS

