

START Panel Flat UGR19 625x625


START FLAT PANEL UGR19 625 4000K G2

0047578



Product features

- Edge lit LED flat low glare panel (UGR<19). Low Flicker, 33 W, Neutral White, 4000 K, 3400 lumens, 103 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 595 x 595 mm

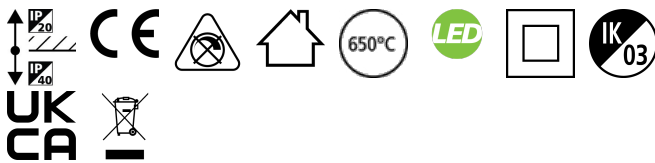


PRODUCT OVERVIEW

Product name	START FLAT PANEL UGR19 625 4000K G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	103
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288475783

PHOTOMETRY

START Panel Flat UGR19 625x625 *START FLAT PANEL UGR19 625 4000K G2* 0047578

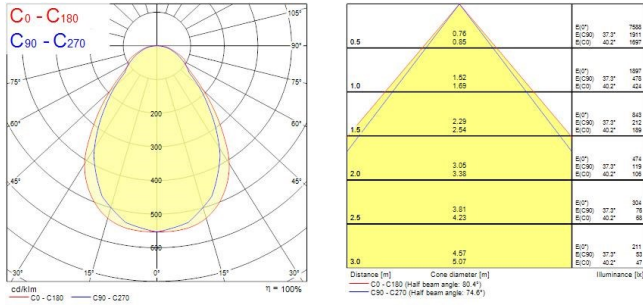

TECHNICAL DRAWINGS

