



A range of sleek and stylish outdoor luminaires

START eco Outdoor Range



START eco Outdoor range is a sleek and stylish range of outdoor luminaires, perfect for lighting gardens, courtyards and exterior entrances.

START eco Outdoor consists of wall mounted fixtures: square and round - with or without an integrated sensor; an adjustable direct/indirect wall mounted luminaire in 2 colours; as well as an L-shaped wall mounted luminaire

and 2 sizes of L-shaped and rectangular bollards.

START eco Outdoor not only delivers high performance: up to 880lm (luminaire lumen output of the square and round wall mounted luminaire); but also high efficiency: up to 78lm/W (total system efficiency of the L-shaped wall mounted luminaire and bollard).

START eco Outdoor



Features

- A range of sleek and stylish outdoor LED luminaires
- Perfect for lighting courtyards, gardens, parks and exterior entrances
- Design meets IK05 requirements
- Available in various shapes, sizes and colours of die cast aluminium luminaires
- Range includes bollards and various wall mounted direct and direct/indirect luminaires
- High efficient thermal design: ta -20 to +45°C.
- High performance: delivers up to 880lm (luminaire lumen output), and up to 78lm/W (total system efficiency)
- Available in warm white (3000K)
- Lifetime: 30,000 hours

Product information

Code	Description	Driver	Body colour	Bollard Height (M)	Colour name	Colour Temperature (K)	Voltage (V)	System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	IP Rating	Lifetime (Hour)	Weight (kg)
Start eco Outdoor													
Surface Wall													
0047933	START eco Surface Wall Round IP54 880lm 830 WHT	Electronic	RAL9016	-	Warm White	3000K	220-240	12	880	73	IP54	30,000	0.83
0047934	START eco Surface Wall Square IP54 880lm 830 WHT	Electronic	RAL9016	-	Warm White	3000K	220-240	12	880	73	IP54	30,000	0.98
0047935	START eco Surface Wall Round IP54 MW 880lm 830 Motion/Daylight WHT	Electronic	RAL9016	-	Warm White	3000K	220-240	13	880	68	IP54	30,000	0.87
0047936	START eco Surface Wall Square IP54 MW 880lm 830 Motion/Daylight WHT	Electronic	RAL9016	-	Warm White	3000K	220-240	13	880	68	IP54	30,000	1.03
0047910	START eco Surface Wall Adjustable Up & Down IP54 2x150lm 830 BLK	Electronic	RAL9005	-	Warm White	3000K	220-240	5	2x150	58	IP54	30,000	0.79
0047911	START eco Surface Wall Adjustable Up & Down IP54 2x150lm 830 WHT	Electronic	RAL9016	-	Warm White	3000K	220-240	5	2x150	58	IP54	30,000	0.79
0047932	START eco Surface Wall L-Shape IP65 620lm 830 BLK	Electronic	RAL9005	-	Warm White	3000K	220-240	8	620	78	IP65	30,000	0.65
Bollard													
0047951	START eco Bollard L-Shape M IP65 620lm 830 BLK	Electronic	RAL9005	0.5	Warm White	3000K	220-240	8	620	78	IP65	30,000	1.53
0047952	START eco Bollard L-Shape L IP65 620lm 830 BLK	Electronic	RAL9005	0.8	Warm White	3000K	220-240	8	620	78	IP65	30,000	2.10
0047930	START eco Bollard Rectangular M IP65 780lm 830 BLK	Electronic	RAL9005	0.5	Warm White	3000K	220-240	13	780	60	IP65	30,000	3.00
0047931	START eco Bollard Rectangular L IP65 780lm 830 BLK	Electronic	RAL9005	0.8	Warm White	3000K	220-240	13	780	60	IP65	30,000	4.50

Legend: 830 = 80 CRI & 3,000K CCT; BLK = Black; WHT = White; M = Medium; L = Large.

Additional Images



START eco Surface Wall Round & MW



START eco Surface Wall Square & MW



START eco Surface Wall Adjustable Up and Down



START eco Surface Wall Adjustable Up and Down



START eco Bollard Rectangular L-Shape



START eco Surface Wall L-Shape




START eco Bollard L-Shape

START eco Outdoor




Photometric Data


START eco Bollard L-Shape L IP65

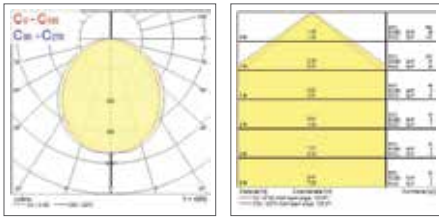


START eco Bollard L-Shape M IP65

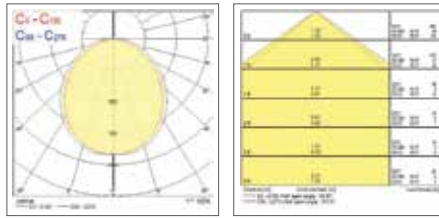


START eco Surface Wall L-Shape IP65

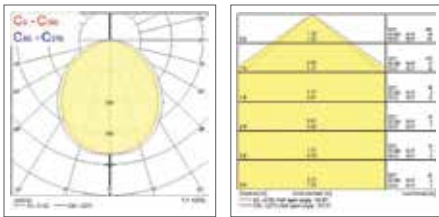


START eco Surface Wall Round IP54 & MW

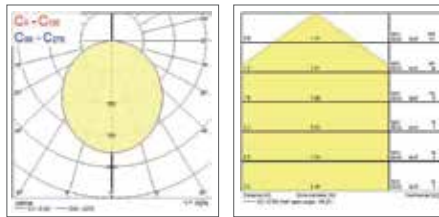


START eco Surface Wall Square IP54 & MW

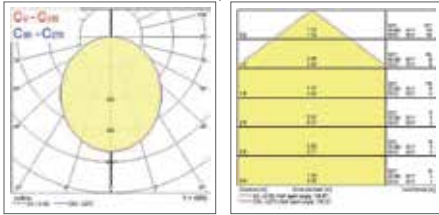


START eco Surface Wall Adjustable Up & Down IP54



START eco Bollard Rectangular L IP65




START eco Bollard Rectangular M IP65




START eco Outdoor




Dimensions (mm)

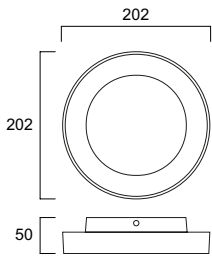


START eco Surface Wall Round
IP54 & MW

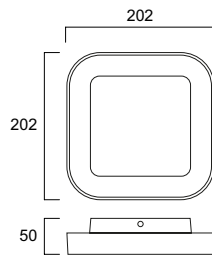


START eco Surface Wall Square
IP54 & MW

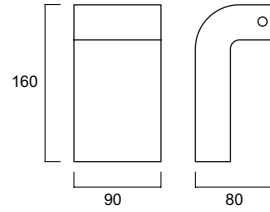


START eco Surface Wall L-Shape IP65

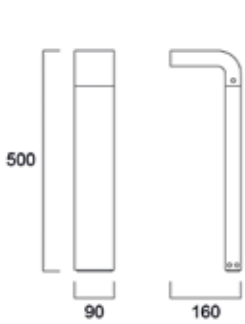



START eco Bollard L-Shape M IP65

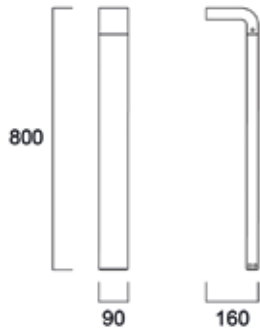


START eco Bollard L-Shape L IP65



Start eco Surface Wall Adjustable

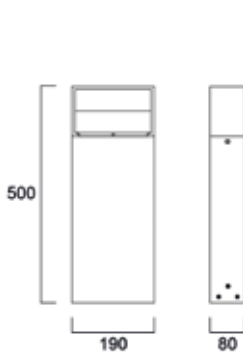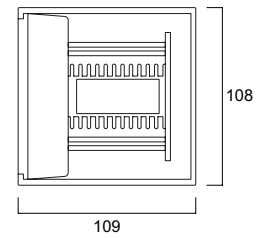

START eco Bollard Rectangular M IP65

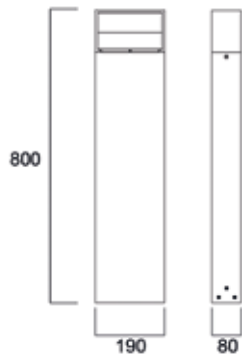

START eco Bollard Rectangular L IP65



sylvania-lighting.com

A Feilo Sylvania Company

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft. Copyright Feilo Sylvania International Group Kft. March 2021

T: F:
Email: