


START eco Downlight Flat IP44 Dimmable 206mm Square Recessed

START eco Downlight Flat 206 Square IP44 1750lm 830 DIM
0053893



Product features

- START eco Downlight Flat IP44 DIM is an integrated LED recessed downlight. Providing 1750 fixture lumens at a wattage of 18W giving a high efficacy of 97lm/W. CRI80, 3000K, Driver current 300 mA. Fitting includes non integrated dimmable driver and has a square ceiling cut out of 206mm. With IP44 from the front and IK06 rating providing uniform distribution with an opal diffuser and 110° beam angle. Including a Loop in Loop out box and built-in white aluminium housing. 30,000 hrs lifetime (L70B50). Electrical Class II.

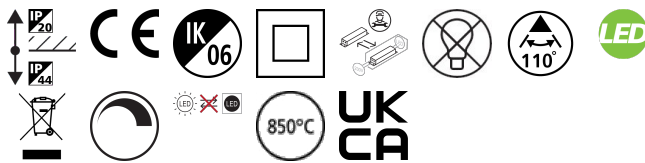


PRODUCT OVERVIEW

Product name	START eco Downlight Flat 206 Square IP44 1750lm 830 DIM
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278093
Warranty	3 years
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	97
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integrated
Dimmable	Yes
Minimum dimming level (%)	10
Housing colour	White
IP rating	IP44/20
IK rating	IK06
Product EAN number	5410288538938

PHOTOMETRY

START eco Downlight Flat IP44 Dimmable 206mm Square Recessed

START eco Downlight Flat 206 Square IP44 1750lm 830 DIM
0053893

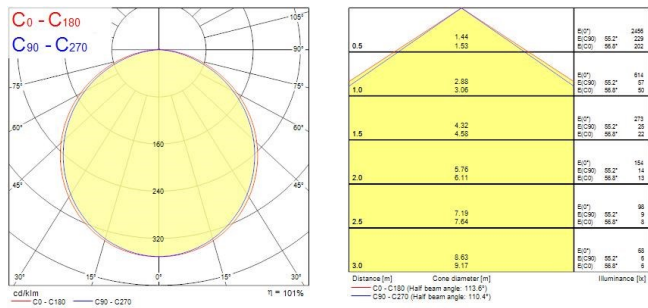

TECHNICAL DRAWINGS

