

CMI-T

CMI-T 35W/NDL UVS

0020367



PRODUCT OVERVIEW

Product name	CMI-T 35W/NDL UVS
Technology	HID
Watt (Rated) (W)	39
Lamp shape	Tubular shape
Type	CMI-T
Cap/Base	G12
Lamp finish	Clear
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC000037
E-number FI	4844404
E-number SE	8359033
E-number Norway	3800941
Luminous flux (lm)	3750
Colour temperature (K)	4200
Light colour	Cool White Deluxe
CRI (Ra)	91
Wattage (W)	35.00
Product Voltage (V)	75

CMI-T CMI-T 35W/NDL UVS 0020367

Dimmable	Yes
Average life (Nominal) (h)	15000
Product EAN number	5410288203676

DATA TABLE

General data

Product name	CMI-T 35W/NDL UVS
Technology	HID
Watt (Rated) (W)	39
Lamp shape	Tubular shape
Type	CMI-T
Cap/Base	G12
Lamp finish	Clear
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC000037
E-number FI	4844404
E-number SE	8359033
E-number Norway	3800941

Optical data

Luminous flux (lm)	3750
Luminous flux (Rated) (lm)	3750
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4200
Light colour	Cool White Deluxe
Colour Code	940
CRI (Ra)	91
Adjustable chromaticity	N
Rated lumen maint. factor (%) at 4000 h 50Hz	83
Rated lumen maint. factor (%) at 6000 h 50Hz	82
Rated lumen maint. factor (%) at 8000 h 50Hz	79
Rated lumen maint. factor (%) at 12000 h 50Hz	76
Rated lumen maint. factor (%) at 16000 h 50Hz	71

Electrical data

Wattage (W)	35.00
Current (A)	0.52
Product Voltage (V)	75
Control gear required	Yes
Transformer required	No
Dimmable	Yes

CMI-T CMI-T 35W/NDL UVS 0020367

kWh per 1000 hours burning time	43
---------------------------------	----

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000
Life T90	9000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	99
Rated survival factor (%) at 6000 h 50Hz	98
Rated survival factor (%) at 8000 h 50Hz	93
Rated survival factor (%) at 12000 h 50Hz	74
Rated survival factor (%) at 16000 h 50Hz	42

Physical data

Max. Lamp Diameter (mm) - D	20
Weight (kg)	0.029

Packaging

Single packaging type	Carton
Product EAN number	5410288203676
Packaging single length / height (cm)	11.23
Packaging single width (cm)	3.33
Packaging single depth (cm)	2.53
DUN14 (inner)	15410288203673
Units per inner package	12
Packaging inner length / height (cm)	12.27
Packaging inner width (cm)	8.2
Packaging inner depth (cm)	13.97
DUN14 (outer)	35410288203677
Units per outer package	96
Packaging outer length / height (cm)	14.2
Packaging outer width (cm)	34.6
Packaging outer depth (cm)	29.2


Safety data

Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes


PHOTOMETRY

CMI-T
 CMI-T 35W/NDL UVS
 0020367

LAMP SPECTRUM

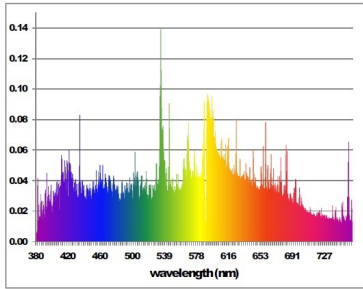


COLOUR RENDERING

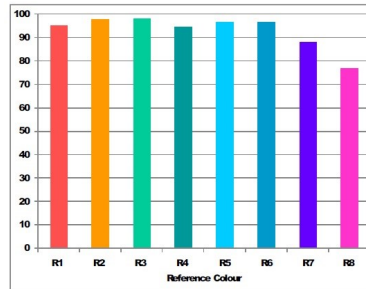

TECHNICAL DRAWINGS

SURVIVAL RATE



LUMEN MAINTENANCE

