

## ToLEDo Superia T8 CCG and AC

ToLEDo SUPERIA T8 V4 5FT 4050LM 27W 865  
0027108



### Product features

- A range of high performance ToLEDo Superia T8 LED tubes with reminiscent look of fluorescent tubes
- High performance glass construction design
- High lumen output - 4050lm, with an impressive lumen efficacy of 150 lm/W
- Omnidirectional light distribution (320°) and wide beam angle (220°)
- A++ energy rating and low power consumption
- Average rated life of 50'000 hours (L70 F50)
- Lamp length - 1500mm
- High power factor 0.95
- 200,000 switching cycle
- 5 years guarantee for complete peace of mind
- Colour temperature -6500K
- Suitable for outdoor applications in weather proof luminaires
- Compatible with electromagnetic gear and also suitable for direct mains operation (220-240V)
- No bending or discoloration over time
- No contactable metal parts, therefore no potential risk of electric shock



### PRODUCT OVERVIEW

Product name	ToLEDo SUPERIA T8 V4 5FT 4050LM 27W 865
Technology	LED
Watt (Rated) (W)	27
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740528
E-number SE	8292594
Warranty	5 years
Luminous flux (lm)	4050
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Consistency (SDCM)	6
Wattage (W)	27
Average life (Nominal) (h)	50000
Product EAN number	5410288271088

### DATA TABLE

#### General data

Product name	ToLEDo SUPERIA T8 V4 5FT 4050LM 27W 865
Technology	LED
Watt (Rated) (W)	27
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Frosted/Coated
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740528
E-number SE	8292594

## ToLEDo Superia T8 CCG and AC

ToLEDo SUPERIA T8 V4 5FT 4050LM 27W 865  
0027108

Warranty	5 years
----------	---------

### Optical data

Luminous flux (lm)	4050
Luminous flux (Rated) (lm)	4050
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Consistency (SDCM)	6
Adjustable chromaticity	N
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	27
Starting time (max) (s)	0.05
Warm-up time to 60% of full light (max) (s)	< 1s => 60%
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Control gear required	No
No. Of switching cycles before premature failures	>200000
Transformer required	No
Drive current (mA)	120
kWh per 1000 hours burning time	27

### Lifetime data

Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

### Physical data

Nominal Product Diameter (mm)	1500
Max. Length base to base (mm) - A	1499
Length base to pin Min-Max (mm) - B	1513
Max. Lamp Diameter (mm) - D	28
Weight (kg)	0.28

### Packaging

Single packaging type	Carton
Product EAN number	5410288271088
Packaging single length / height (cm)	158.0
Packaging single width (cm)	4.6
Packaging single depth (cm)	4.6
DUN14 (outer)	05410288271088
Units per outer package	10
Packaging outer length / height (cm)	160.5
Packaging outer width (cm)	25.9
Packaging outer depth (cm)	12.2


## ToLEDo Superia T8 CCG and AC

ToLEDo SUPERIA T8 V4 5FT 4050LM 27W 865  
0027108

### Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture

### PHOTOMETRY

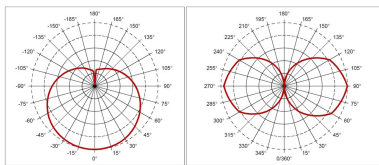

### TECHNICAL DRAWINGS

