


DeltaWing LED - Electronic

DELTAWING LED40 EB 4K 1200
0044871



Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, Electronic, 4030lm, 36W, lifespan: 55,000 hours L90B10, A++ A+ A

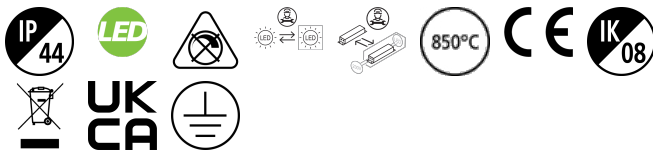

PRODUCT OVERVIEW

| | |
|-----------------------------|--|
| Product name | DELTAWING LED40 EB 4K 1200 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting, Suspended |
| Environment | Internal |
| General application | Education, Hospitality, Logistics & Industry, Office, Retail |
| ETIM Class | EC002892 |
| E-number FI | 4274305 |
| E-number SE | 7014019 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 4030 |
| Luminaire efficacy (lm/W) | 111.94 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Beam Angle (°) | 103 |
| Glare control | < 22 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 36 |
| Product Voltage (V) | 240 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | No |
| Minimum dimming level (%) | 99 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | White |
| IP rating | IP44 |
| IK rating | IK08 |
| Product EAN number | 5410288448718 |

DeltaWing LED - Electronic


DELTAWING LED40 EB 4K 1200
0044871

PHOTOMETRY

| | | | |
|-----|--------------|----------------------------|--------------------|
| 0.5 | 1.27 1.46 | E(0°) E(C90) E(C180) | 1115 809 891 |
| 1.0 | 2.53 2.91 | E(0°) E(C90) E(C180) | 1279 105 117 |
| 1.5 | 3.80 4.37 | E(0°) E(C90) E(C180) | 988 95 92 |
| 2.0 | 5.06 5.82 | E(0°) E(C90) E(C180) | 744 70 67 |
| 2.5 | 6.33 7.28 | E(0°) E(C90) E(C180) | 595 56 53 |
| 3.0 | 7.60 8.73 | E(0°) E(C90) E(C180) | 442 41 38 |

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 113.9°)
— C90 - C270 (Half beam angle: 103.4°)



TECHNICAL DRAWINGS

