

START DOWNLIGHT IP44 205


START Downlight 205 IP44 2025lm 840

0030329



Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2025LM, 21W, 101lm/W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V

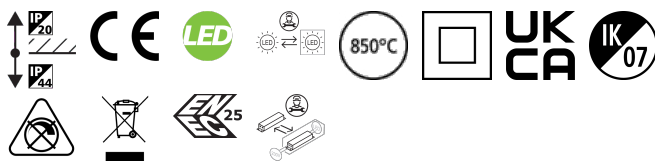

PRODUCT OVERVIEW


Product name	START Downlight 205 IP44 2025lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278153
Warranty	5 years
Fixture luminous flux (lm)	2025
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303291

PHOTOMETRY

START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840

0030329



0.5	0.82	E(0°) E(C0)	4478 1020
1.0	1.65	E(0°) E(C0)	1120 250
1.5	2.47	E(0°) E(C0)	496 114
2.0	3.30	E(0°) E(C0)	280 64
2.5	4.12	E(0°) E(C0)	178 41
3.0	4.95	E(0°) E(C0)	124 28

Distance [m] Cone diameter [m] Illuminance [lx]

C0 - C180 (Half beam angle: 78.0°)

TECHNICAL DRAWINGS

