


## Myriad Adjustable Square - White with White bezel

MYRIAD ADJ SQUARE WHITE 4000K PHDIM WHITE BEZ  
2056228



### Product features

- The Myriad Adjustable Square recessed spotlight is a high efficient accent downlight, fixture color RAL 9016 - Traffic white / Bezel, correlated colour temperature of 4000K, color rendering index Ra105, fixture lumen 684lm, total power consumption 10W, luminaire efficacy 68 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 76mm, width 76mm, height 115mm, cut-out dimension 72x72mm, IP rating IP20, 5 years warranty.



### PRODUCT OVERVIEW

Product name	MYRIAD ADJ SQUARE WHITE 4000K PHDIM WHITE BEZ
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001744
E-number FI	4278843
Warranty	5 years
Fixture luminous flux (lm)	684
Luminaire efficacy (lm/W)	68
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	24
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Remote
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768562282

### DATA TABLE

#### General data

Product name	MYRIAD ADJ SQUARE WHITE 4000K PHDIM WHITE BEZ
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting

## Myriad Adjustable Square - White with White bezel

*MYRIAD ADJ SQUARE WHITE 4000K PHDIM WHITE BEZ*  
2056228

Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278843
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	684
Luminaire efficacy (lm/W)	68
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	24
Distribution type	Symmetric
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	10
Mains voltage (V)	230-240V~
Electrical protection	Class II
Control gear mounting	Remote
Transformer required	Yes
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	50000
------------------	-------

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	76
Nominal Product Height (mm)	115
Weight (kg)	0.38
Recessed Depth (mm)	115

### Packaging

Single packaging type	Carton
Product EAN number	5025768562282
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0

## Myriad Adjustable Square - White with White bezel

*MYRIAD ADJ SQUARE WHITE 4000K PHDIM WHITE BEZ*  
2056228


Packaging single depth (cm)	17.5
DUN14 (outer)	05025768562282
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### PHOTOMETRY

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>10</sub> [lx]	E <sub>30</sub> [lx]
0.5	0.23	12208	3701	
1.0	0.46	3052	1425	
1.5	0.69	1358	633	
2.0	0.92	793	359	
2.5	1.15	488	226	
3.0	1.37	339	156	

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 25.5°)

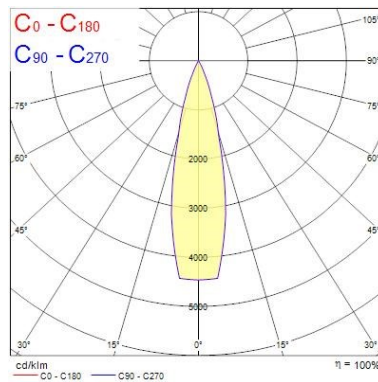

### TECHNICAL DRAWINGS

